



Overview

Ultra320 SCSI and SATA Model

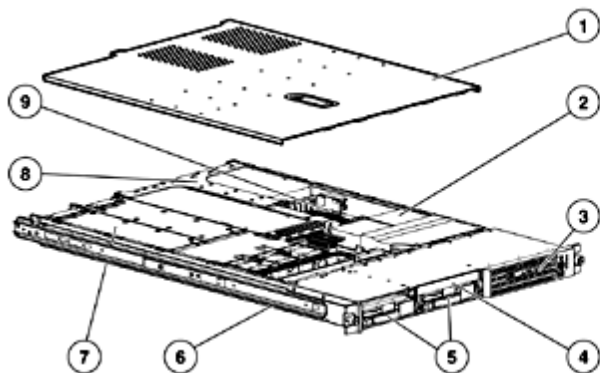

1. Removable server hood
2. Up to two Intel Xeon™ processors
3. Removable processor fan assembly with front and secure internal USB ports
4. Removable media bay
5. Two 1" Ultra320 hot plug drive bays; or
Two 1" SATA pluggable drive bays; or
Four Serial Attached SCSI hot plug drive bays

Serial Attached SCSI (SAS) Model

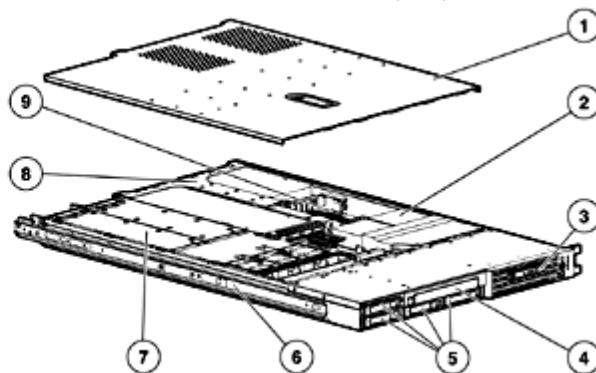

6. Sliding rails standard for in rack servicing
7. Redundant power supplies
8. 1 full length and 1 half length PCI-X slots (optional PCI Express)
9. Up to 12GB DDR2 PC2-3200 SDRAM

What's New

- 2.8 GHz dual-core Intel® Xeon™ processors are now available with the powerful HP ProLiant DL360 G4p Serial Attached SCSI (SAS) model. Offering up to a 50% performance increase over single core processors, the dual-core Intel Xeon offers a 2x2MB L2 cache and 64-bit capability.
- 3.8 GHz Intel® Xeon™ processors are available now available with robust HP ProLiant DL360 G4p SCSI and SAS models and includes 2MB L2 cache and 64-bit support.
- Introducing Xeon™ 3.0 GHz low voltage processor for performance per watt optimization in dense server environments

Overview

At A Glance

- Enterprise-class ultra dense server combining compute power, integrated Lights-Out management, and essential fault tolerance, The HP ProLiant DL360 G4p is optimized for space constrained data center installations.
- HP ProLiant DL360 G4p offers concentrated compute power for best performance per rack, reliability, and manageability
- Built in reliability and availability features: embedded RAID, redundant fans, redundant power option, pre-failure notifications, and Lights-Out Management
- 64-bit Intel® Xeon™ processors supporting 64-bit extension and 64-bit Microsoft Windows and Linux operating systems
- Up to 12 GB of PC2-3200 DDR2 400 SDRAM; with 2-way interleaving
- Advanced ECC memory standard; optional Online Spare Memory
- Two 64-bit/133 MHz PCI-X slots
- Optional PCI-X to PCI-Express conversion kit
- Integrated Lights-Out (iLO) remote management embedded on every HP ProLiant DL360 G4p
- Optional Integrated Lights-Out support for Power Regulator for ProLiant and introducing support for the draft DMTF System Management Architecture for Server Hardware Command Line Protocol standard
- HP Power Regulator for ProLiant delivering server level, policy based power management with industry leading energy efficiency and savings on system power and cooling costs
- Support for iLO Shared Network Port enables access to the iLO management processor through one of the embedded system NICs
- Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
- Fan redundancy, standard
- Hot plug power supply with optional 1+1 redundancy
- 1U Rack form factor (1.75")
- Sliding rails for in rack servicing ship standard; optional ambidextrous cable management arm
- ProLiant Essential Foundation Pack standard, including HP Systems Insight Manager, SmartStart, SmartStart Scripting Toolkit, Subscriber's Choice and ROM Based Setup Utility (RBSU).
- SAS Model - best performance:
 - Up to 2.8 GHz Dual-core and 3.8 GHz single-core Intel Xeon processor options
 - Smart Array P600 RAID Controller with 256MB transportable battery backed cache
 - Up to four Small Form Factor (SFF) Serial Attached SCSI (SAS) hot plug hard drives or four SFF Serial ATA (SATA) hard drives
- SCSI Model - best price/performance:
 - Up to 3.8 GHz single-core processor Intel Xeon processor options
 - Embedded Smart Array 6i RAID Controller with optional 128MB transportable battery backed cache (SCSI models)
 - Up to two HP Universal SCSI hot plug disk drives
- SATA Model - best prices:
 - Up to 3.6 GHz single-core processor Intel Xeon processor options
 - Embedded 2 Port SATA Controller (SATA models)
 - Up to two pluggable Serial ATA disk drives
- Protected by HP Services and a worldwide network of resellers and service providers. Three-year Next Business Day, on-site limited global warranty. Certain restrictions and exclusions apply. Pre-Failure Notification on processors, memory, and SCSI hard drives. SATA hard drives have a one-year warranty.

Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor Intel Xeon Processor 2.8 GHz/800MHz -2MB L2
One of the following depending on Model Intel Xeon Processor 3.0 GHz/800MHz -2MB L2
Intel Xeon Processor 3.0 GHz/800MHz -2MB L2, Low Voltage
Intel Xeon Processor 3.2 GHz/800MHz -2MB L2
Intel Xeon Processor 3.4 GHz/800MHz -2MB L2
Intel Xeon Processor 3.6 GHz/800MHz -2MB L2
Intel Xeon Processor 3.8 GHz/800MHz -2MB L2

Dual-core Intel Xeon Processor 2.8 GHz/800MHz - 2x2MB L2

NOTE: Supported on HP ProLiant DL360 G4p Serial Attached SCSI (SAS) models only.

Processor Cache 2MB Level 2 cache memory

Upgradeability Upgradeable to dual processing

Chipset Intel chipset is E7520

Memory Protection & Functionality Advanced ECC (multi-bit error protection)
Online spare
2-way interleaving

Memory	Type	PC2-3200 DDR2 400 SDRAM
	Standard	1 GB (2 x 512 MB)
	Standard (on some models)	2 GB (2 x 1024 MB)
	Maximum	12 GB

Network Controller Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter

Standard Features

Expansion Slots	Slot Number	Bus Speed	Bus Number*	Device Number**	Hot Plug	PCI Voltage
	1	64-bit/133MHz PCI-X	7	0	no	3.3 Volt
	1	x8 PCI Express (option)	3	0	no	n/a
	2	64-bit/133MHz PCI-X	10	0	no	3.3 Volt
	2	x8 PCI Express (option)	13	0	no	n/a

*NOTE: Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

**NOTE: Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

NOTE: For more information regarding PCI-X, please see the following URL:

<http://www.hp.com/servers/pci-x>.

NOTE: All slots can accept universal keyed PCI cards.

Manageability Integrated Lights-Out (iLO) Management (integrated on motherboard)

Storage Controllers

SAS Models	HP Smart Array P600 Controller with 256MB Cache (installed in PCI-X slot) NOTE: The Smart Array P600 controller offers an external 4X SAS port for additional storage expansion.
SCSI Models	HP Smart Array 6i Controller (embedded) NOTE: The HP ProLiant DL360 G4p does not offer an external SCSI port.
SATA Models	HP embedded 2 Port SATA Controller (integrated on system board) NOTE: The HP embedded 2 Port SATA controller does not support RAID, hot plug drive functionality or drive activity LEDs. NOTE: SATA RAID 0, 1 is available with the optional purchase of the HP 8-port SAS HBA (347786-B21) and HP SAS/SATA Cable Kit (398307-B21) - hot-plug drive functionality and drive activity LEDs not supported.

Storage

Optical Drives	Ejectable CD-ROM (Standard in most models), DVD-ROM, or DVD-RW drives, or Slimline floppy NOTE: Slimline Floppy Diskette Drive is not supported in SCSI and SATA models.
Diskette Drive	1.44 MB Diskette Drive NOTE: Standard in SCSI models; optional in SATA models; not available in SAS models.
Drive Bays	SAS Model: 4 Small Form Factor SCSI Model: 2 HP Universal SCSI SATA Model: 2 Pluggable SATA

Standard Features

Maximum Internal Storage Type	SAS Model	292 GB SAS	4 x 72.8 GB Serial SCSI
		240 GB SATA	4 x 60 GB Serial ATA
	SCSI Model	600 GB	2 x 300 GB Ultra320 SCSI
	SATA Model	1 TB	2 x 500 GB Serial ATA

Interfaces	Serial	1		
	Pointing Device (Mouse)	1		
	Graphics	1		
	Hot Plug Keyboard	1		
	USB	3 (rear, front, internal)		
				NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html .
	Network RJ-45	2		
iLO remote management port	1			

Graphics	Integrated ATI RAGE XL Video Controller with 8-MB SDRAM Video Memory
----------	--

Form Factor	Rack (1U), (1.75 in/4.45 cm)
-------------	------------------------------

ProLiant Essentials Foundation Pack Software	HP Systems Insight Manager	HP's new HP Systems Insight Manager (HP SIM) helps maximize system uptime and performance and reduce system maintenance costs by providing proactive notification of problems before those problems result in unplanned downtime or reduced productivity. HP SIM are both easy to set up work with the Insight Management Agents, integrated Lights-Out and Remote Insight Lights-Out Edition, and Version Control Agents to deliver robust fault, configuration, and asset management as well as remote administration. With HP SIM customers will also be able to take advantage of role-based security; the ability to manage ProLiant, Integrity, and HP 9000 systems; and plug-ins for storage, client, printer, and power management as well as server rapid deployment, performance management, and workload management. For more details on HP SIM visit http://www.hp.com/go/hpsim .
	SmartStart	SmartStart is a tool that simplifies server setup, providing a rapid way to deploy reliable and consistent server configurations. For more information, please visit the SmartStart Web site at http://www.hp.com/servers/smartstart . SmartStart version supported (minimum): SmartStart 7.2.
	Management Agents	The Management Agents form the foundation for HP's Intelligent Manageability strategy. They provide direct, browser-based access to in-depth instrumentation built into HP servers, workstations, desktops, and portables, and send alerts to HP System Insight Manager and other enterprise management applications in case of subsystem or environmental failures. For additional information about the Management Agents and other management products from HP, please visit the management Web site at http://www.hp.com/servers/manage .

Standard Features

Subscriber's Choice	Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides automatic delivery of software and driver change notifications for ProLiant products. Sign up at http://www.hp.com/go/subscriberschoice and customize your profile to receive various new alerts as they become available, on a weekly or monthly basis.
ROMPaq, support software, and configuration utilities	The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options available in SmartStart or downloadable from Software and Drivers download pages: http://www.hp.com/go/support
Insight Diagnostics Online Edition	The most advanced configuration analysis, reporting and troubleshooting utilities used by HP and at your fingertips, available in SmartStart.
Optional ProLiant Essentials Value Packs	Optional software offerings that selectively extend the functionality of an Adaptive Infrastructure to address specific business problems and needs: <ul style="list-style-type: none">• Rapid Deployment Pack - an automated solution for multi-server deployment and provisioning, enabling companies to quickly and easily adapt to changing business demands.• Workload Management Pack - provides easier management of complex environments, improving overall server utilization and enabling Windows® 2000 customers for the first time to confidently deploy multiple applications on a single multiprocessor ProLiant Server.• Integrated Lights-Out Advanced Pack - upgrades the Integrated Lights-Out processor to full virtual presence and control with graphical console and virtual media.• Performance Management Pack - a performance management solution that identifies and explains hardware performance bottlenecks on ProLiant servers and attached options enabling users to better utilize their valuable resources.• Intelligent Networking Pack - detects and analyzes network bottlenecks or broken network linkages and steers traffic to the optimum route based on network conditions, plus it provides an extra layer of protection. The virus throttle feature of the solution slows the propagation of fast spreading virus• Vulnerability and Patch Management Pack - identifies and remediates software security vulnerabilities due to missing patches as well operating system configurations that can be exploited by viruses, worms, and other blended threats• Virtual Machine Management Pack - provides central management and control of virtual machines from Microsoft and VMware. Integrated approach provides the ability to manage both physical and virtual resources from a single management console.

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessential>.

Standard Features

Industry Standard Compliance	ACPI 1.0b Compliant PCI 2.2 Compliant Microsoft® Logo certifications USB 1.1 and 2.0 Compliant
-------------------------------------	---

Remote Manageability	Integrated Lights-Out (iLO) Standard Management: <ul style="list-style-type: none">• Virtual Text Remote Console• Virtual Power Button Control• Dedicated & shared LAN Connectivity• Browser and command line access• Automatic IP Configuration via DHCP/DNS/WINS• Industry Standard 128-bit Secure Sockets Layer (SSL) and Secure Shell Security• IML and iLO Event Logging• Support for 12 user accounts with customizable access privilege Integrated Lights Out Advanced Pack (optional) Remote Lights out Edition II (optional)
-----------------------------	--

Intelligent Manageability	HP Systems Insight Manager SmartStart Remote Insight Lights-Out Edition II (optional) ROM-Based Setup Utility (RBSU) Remote-Flash Redundant ROM Integrated Management Log (IML) Server Health logging Automatic Server Recovery-2 (ASR-2) System Interconnect Status Indicators Dynamic sector repairing and drive parameter tracking (with Smart Array controllers) Hot Spare Boot (NOTE: Upon the event of a failed processor or VRM in a multi-processing environment, the system will automatically reboot and use the remaining good processor(s).) Power Down Utility Pre-Failure Warranty (covers processors, as well as SCSI hard drives and memory)
----------------------------------	--

Security	Power-on password Keyboard password Diskette drive control Diskette boot control QuickLock, Network Server Mode Removable CD and Diskette Drive Assembly Serial interface control Administrator's password Disk configuration lock Integrated Lights-Out has 12 customizable user accounts and SSL encryption Integrated Lights-Out can be disabled via a Global Setting
-----------------	--

Server Power Cords	High line cord ships standard with all part numbers, an additional low line cord for US and Japan
---------------------------	---

Standard Features

UPS Power Cord Matrix	Please see the UPS Power Cord Matrix for cable descriptions, requirements, and specifications for UPS units: ftp://ftp.compaq.com/pub/products/servers/proliantstorage/power-protection/powercordmatrix.pdf .
Power Supply	SAS Models: 535W Optional (1 + 1 redundant) power supply NOTE: PN 389830-B21 contains the optional power supply and an IEC power cable only; purchase if connecting to PDU/UPS that supports IEC cables. PN 389830-001 contains a low line (NEMA) power cord only. SCSI & SATA Models: 460W Optional (1 + 1 redundant) power supply NOTE: PN 354587-B21 contains the optional power supply and an IEC power cable only; purchase if connecting to PDU/UPS that supports IEC cables. PN 354587-001 contains a low line (NEMA) power cord only.
System Fans	7 fans ship standard; Fan redundancy standard
Required Cabling	For required cabling information, refer to the Web site at http://h18000.www1.hp.com/products/servers/proliantdl360/ .
OS Support	Microsoft Windows 2000 Server Microsoft Windows Server 2003 Novell NetWare Linux (Red Hat, SuSE, UnitedLinux) Solaris VMware Virtualization Software NOTE: SAS, SCSI and SATA models may have different OS support. Please see OS Support Matrix. NOTE: For a more complete and up-to-date listing of supported OSs and versions, please visit our OS Support Matrix page at: http://www.hp.com/go/supportos . NOTE: For more complete and up-to-date information on how to buy server operating systems from HP please visit the OS product site at: http://h18004.www1.hp.com/products/servers/software/OEM.html NOTE: For a listing of the latest drivers available for the HP ProLiant DL360, please see: http://h18023.www1.hp.com/support/files/server/us/index.html . NOTE: For a more complete and up-to-date information on Linux support, please visit HP Linux Web site at http://h18000.www1.hp.com/products/servers/linux/hpLinuxcert.html . NOTE: For more information on HP's Certified and Supported ProLiant Servers, please visit the VMware Server Support Matrix at: http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html .

Standard Features

Rack Airflow Requirements

Rack 10000 series Cabinets

The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment:

- **Front and rear doors:** If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).
- **Side:** The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

NOTE: For additional information, refer to the Setup and Installation Guide or the Documentation CD provided with the server, or to the server documentation located in the Support section at the following URL: <http://h18000.www1.hp.com/products/servers/proliantdl360/index.html>.

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

Customer Builder

Please see the Enterprise Configurator for configuration assistance at: <http://www.hp.com/products/configurator>.

Standard Features

Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of resellers and service providers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

NOTE: Limited warranty includes 3 year parts, 3 year labor, 3-year on-site support.

NOTE: SATA drives have a 1 year warranty.

Care Pack services provide a range of life cycle support options that let you choose the service levels that meet your business requirements, from basic to mission-critical.

A full range of HP Care Pack hardware and software services are available including:

- Installation and start up
- Education courses
- Extended onsite hardware coverage hours from same business day 13 hours, 5 day to 24 hours, 7 days call window with options including 4-hour response or 6-hour Call To Repair
- Comprehensive range of software technical support for Microsoft, Linux, ProLiant Essentials and VMWare-based IT solutions helping to deliver high level of application availability. Response times range from 30 mins for critical problems to 2 hours.
- System Management, Performance Services and Mission Critical Support Solution

HP Care Pack services include coverage for the HP branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as 22" and smaller external monitors and tower UPS options up to 3kVA; these items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

NOTE: For more information on HP Care Pack services, contact any of our worldwide sales offices or resellers or visit our worldwide Web site on the internet at: <http://www.hp.com/hps/carepack>

NOTE: For more complete information on HP Services offerings, customers and resellers, please visit us at: <http://www.hp.com/hps>

NOTE: Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Models

SAS Models

DL360R04p Dual-core X2.8-2x2MB/800, 1GB SAS 408579-xx1	Processor	(1) Dual-core Intel Xeon Processor 2.8 GHz/800MHz standard (up to 2 supported)
	Cache Memory	2MB level 2 cache
	Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
	Storage Controller	HP Smart Array P600 Controller
	Hard Drives	None ship standard; system supports up to four Serial SCSI or Serial ATA drives.
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
	Power Supply	One 535W power supply (redundant power supply optional)
	Optical Drive	Slimline CD-ROM Drive
	PCI-X Slots	1 full length and 1 half length 64bit/133 MHz PCI-X slot NOTE: Full length slot is occupied with HP Smart Array P600 Controller and is not available.
	Form Factor	Rack (1U), (1.75 in/4.45 cm)

DL360R04p X3.0-2MB/800, 1GB SAS 389820-xx1	Processor	(1) Intel Xeon Processor 3.0 GHz/800MHz standard (up to 2 supported)
	Cache Memory	2MB level 2 cache
	Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
	Storage Controller	HP Smart Array P600 Controller
	Hard Drives	None ship standard; system supports up to four Serial SCSI or Serial ATA drives.
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
	Power Supply	One 535W power supply (redundant power supply optional)
	Optical Drive	Slimline CD-ROM Drive
	PCI-X Slots	1 full length and 1 half length 64bit/133 MHz PCI-X slot NOTE: Full length slot is occupied with HP Smart Array P600 Controller and is not available.
	Form Factor	Rack (1U), (1.75 in/4.45 cm)

Models

DL360R04p X3.2-2MB/800, 2GB SAS RPS 389821-xx1	Processor	(1) Intel Xeon Processor 3.2 GHz/800MHz standard (up to 2 supported)	
	Cache Memory	2MB level 2 cache	
	Memory	2 GB (2 x 1024 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM	
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter	
	Storage Controller	HP Smart Array P600 Controller	
	Hard Drives	None ship standard; system supports up to four Serial SCSI or Serial ATA drives.	
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)	
	Power Supply	Two 535W power supplies (1 + 1 redundant)	
	Optical Drive	Slimline CD-ROM Drive	
	PCI-X Slots	1 full length and 1 half length 64bit/133 MHz PCI-X slot NOTE: Full length slot is occupied with HP Smart Array P600 Controller and is not available.	
	Form Factor	Rack (1U), (1.75 in/4.45 cm)	
	<hr/>		
	DL360R04p X3.4-2MB/800, 2GB SAS RPS 389822-xx1	Processor	(1) Intel Xeon Processor 3.4 GHz/800MHz standard (up to 2 supported)
Cache Memory		2MB level 2 cache	
Memory		2 GB (2 x 1024 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM	
Network Controller		Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter	
Storage Controller		HP Smart Array P600 Controller	
Hard Drives		None ship standard; system supports up to four Serial SCSI or Serial ATA drives.	
Remote Management		Integrated Lights-Out (iLO) Standard Management (embedded)	
Power Supply		Two 535W power supplies (1 + 1 redundant)	
Optical Drive		Slimline CD-ROM Drive	
PCI-X Slots		1 full length and 1 half length 64bit/133 MHz PCI-X slot NOTE: Full length slot is occupied with HP Smart Array P600 Controller and is not available.	
Form Factor		Rack (1U), (1.75 in/4.45 cm)	

Models

DL360R04p X3.6-2MB/800, 2GB SAS RPS 389823-xx1	Processor	(1) Intel Xeon Processor 3.6 GHz/800MHz standard (up to 2 supported)	
	Cache Memory	2MB level 2 cache	
	Memory	2 GB (2 x 1024 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM	
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter	
	Storage Controller	HP Smart Array P600 Controller	
	Hard Drives	None ship standard; system supports up to four Serial SCSI or Serial ATA drives.	
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)	
	Power Supply	Two 535W power supplies (1 + 1 redundant)	
	Optical Drive	Slimline CD-ROM Drive	
	PCI-X Slots	1 full length and 1 half length 64bit/133 MHz PCI-X slot NOTE: Full length slot is occupied with HP Smart Array P600 Controller and is not available.	
	Form Factor	Rack (1U), (1.75 in/4.45 cm)	
	<hr/>		
	DL360R04p X3.8-2MB/800, 2GB SAS RPS 394919-xx1	Processor	(1) Intel Xeon Processor 3.8 GHz/800MHz standard (up to 2 supported)
Cache Memory		2MB level 2 cache	
Memory		2 GB (2 x 1024 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM	
Network Controller		Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter	
Storage Controller		HP Smart Array P600 Controller	
Hard Drives		None ship standard; system supports up to four Serial SCSI or Serial ATA drives.	
Remote Management		Integrated Lights-Out (iLO) Standard Management (embedded)	
Power Supply		Two 535W power supplies (1 + 1 redundant)	
Optical Drive		Slimline CD-ROM Drive	
PCI-X Slots		1 full length and 1 half length 64bit/133 MHz PCI-X slot NOTE: Full length slot is occupied with HP Smart Array P600 Controller and is not available.	
Form Factor		Rack (1U), (1.75 in/4.45 cm)	

Models

SCSI Models

DL360R04p X3.8-
2MB/800, 2GB SCSI,
RPS
376235-xx1

Processor	(1) Intel Xeon Processor 3.8 GHz/800MHz standard (up to 2 supported)
Cache Memory	2MB level 2 cache
Memory	2 GB (2 x 1 GB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
Storage Controller	U320 Smart Array 6i Controller (embedded on system board) NOTE: The HP ProLiant DL360 G4p does not offer an external SCSI port.
Hard Drives	None ship standard; system supports up to two 1" hot plug U320 drives NOTE: The HP ProLiant DL360 G4p SCSI models only support U320 Universal Hot Plug drives.
Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
Power Supply	Two 460W power supplies
Optical Drive	24x IDE CD-ROM Drive (Low-profile)
Diskette Drive	1.44 MB Diskette Drive
PCI-X Slots	1 full length and 1 half length 64bit/133MHz PCI-X slot
Form Factor	Rack (1U), (1.75 in/4.45 cm)

DL360R04p X3.6-
2MB/800, 1GB SCSI
376236-xx1

Processor	(1) Intel Xeon Processor 3.6 GHz/800MHz standard (up to 2 supported)
Cache Memory	2MB level 2 cache
Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
Storage Controller	U320 Smart Array 6i Controller (embedded on system board) NOTE: The HP ProLiant DL360 G4p does not offer an external SCSI port.
Hard Drives	None ship standard; system supports up to two 1" hot plug U320 drives NOTE: The HP ProLiant DL360 G4p SCSI models only support U320 Universal Hot Plug drives.
Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
Power Supply	One 460W power supply (redundant power supply optional)
Optical Drive	24x IDE CD-ROM Drive (Low-profile)
Diskette Drive	1.44 MB Diskette Drive
PCI-X Slots	1 full length and 1 half length 64bit/133MHz PCI-X slot
Form Factor	Rack (1U), (1.75 in/4.45 cm)

Models

DL360R04p X3.6-2MB/800, 2GB SCSI, RPS 378705-xx1	Processor	(1) Intel Xeon Processor 3.6 GHz/800MHz standard (up to 2 supported)
	Cache Memory	2MB level 2 cache
	Memory	2 GB (2 x 1 GB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
	Storage Controller	U320 Smart Array 6i Controller (embedded on system board) NOTE: The HP ProLiant DL360 G4p does not offer an external SCSI port.
	Hard Drives	None ship standard; system supports up to two 1" hot plug U320 drives NOTE: The HP ProLiant DL360 G4 SCSI models only support U320 Universal Hot Plug drives.
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
	Power Supply	Two 460W power supplies (1+1 redundant)
	Optical Drive	24x IDE CD-ROM Drive (Low-profile)
	Diskette Drive	1.44 MB Diskette Drive
	PCI-X Slots	1 full length and 1 half length 64bit/133MHz PCI-X slot
	Form Factor	Rack (1U), (1.75 in/4.45 cm)

DL360R04p X3.4-2MB/800, 2GB SCSI, RPS 380079-xx1	Processor	(1) Intel Xeon Processor 3.4 GHz/800MHz standard (up to 2 supported)
	Cache Memory	2MB level 2 cache
	Memory	2 GB (2 x 1-GB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
	Storage Controller	U320 Smart Array 6i Controller (embedded on system board) NOTE: The ProLiant DL360 G4p does not offer an external SCSI port.
	Hard Drives	None ship standard; system supports up to two 1" hot plug U320 drives NOTE: The ProLiant DL360 G4p SCSI models only support U320 Universal Hot Plug drives.
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
	Power Supply	Two 460W power supply (1+1 redundant)
	Optical Drive	24x IDE CD-ROM Drive (Low-profile)
	Diskette Drive	1.44 MB Diskette Drive
	PCI-X Slots	1 full length and 1 half length 64bit/133MHz PCI-X slot
	Form Factor	Rack (1U), (1.75 in/4.45 cm)

Models

DL360R04p X3.4-
2MB/800, 1GB SCSI
376237-xx1

Processor	(1) Intel Xeon Processor 3.4 GHz/800MHz standard (up to 2 supported)
Cache Memory	2MB level 2 cache
Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
Storage Controller	U320 Smart Array 6i Controller (embedded on system board) NOTE: The HP ProLiant DL360 G4p does not offer an external SCSI port.
Hard Drives	None ship standard; system supports up to two 1" hot plug U320 drives NOTE: The HP ProLiant DL360 G4 SCSI models only support U320 Universal Hot Plug drives.
Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
Power Supply	One 460W power supply (redundant power supply optional)
Optical Drive	24x IDE CD-ROM Drive (Low-profile)
Diskette Drive	1.44 MB Diskette Drive
PCI-X Slots	1 full length and 1 half length 64bit/133MHz PCI-X slot
Form Factor	Rack (1U), (1.75 in/4.45 cm)

DL360R04p X3.2-
2MB/800, 1GB SCSI
379753-xx1

Processor	(1) Intel Xeon Processor 3.2 GHz/800MHz standard (up to 2 supported)
Cache Memory	2MB level 2 cache
Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
Storage Controller	U320 Smart Array 6i Controller (embedded on system board) NOTE: The HP ProLiant DL360 G4p does not offer an external SCSI port.
Hard Drives	None ship standard; system supports up to two 1" hot plug U320 drives NOTE: The HP ProLiant DL360 G4 SCSI models only support U320 Universal Hot Plug drives.
Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
Power Supply	One 460W power supply (redundant power supply optional)
Optical Drive	24x IDE CD-ROM Drive (Low-profile)
Diskette Drive	1.44 MB Diskette Drive
PCI-X Slots	1 full length and 1 half length 64bit/133MHz PCI-X slot
Form Factor	Rack (1U), (1.75 in/4.45 cm)

Models

DL360R04p X3.0-2MB/800, 1GB SCSI 380325-xx1	Processor	(1) Intel Xeon Processor 3.0 GHz/800MHz standard (up to 2 supported)
	Cache Memory	2MB level 2 cache
	Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
	Storage Controller	U320 Smart Array 6i Controller (embedded on system board) NOTE: The HP ProLiant DL360 G4p does not offer an external SCSI port.
	Hard Drives	None ship standard; system supports up to two 1" hot plug U320 drives NOTE: The HP ProLiant DL360 G4 SCSI models only support U320 Universal Hot Plug drives.
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
	Power Supply	One 460W power supply (redundant power supply optional)
	Optical Drive	24x IDE CD-ROM Drive (Low-profile)
	Diskette Drive	1.44 MB Diskette Drive
	PCI-X Slots	1 full length and 1 half length 64bit/133MHz PCI-X slot
	Form Factor	Rack (1U), (1.75 in/4.45 cm)

SATA Models

DL360R04p X3.6-2MB/800, 1GB SATA 378704-xx1	Processor	(1) Intel Xeon Processor 3.6 GHz/800MHz standard (up to 2 supported)
	Cache Memory	2MB level 2 cache
	Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
	Storage Controller	Embedded SATA controller NOTE: The HP embedded 2 Port SATA controller does not support RAID, hot plug drive functionality or drive activity LEDs. NOTE: SATA RAID 0, 1 is available with the optional purchase of the HP 8-port SAS HBA (347786-B21) and HP SAS/SATA Cable Kit (398307-B21) - hot-plug drive functionality and drive activity LEDs not supported.
	Hard Drives	None ship standard; system supports up to two Serial ATA drives
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
	Power Supply	One 460W power supply (redundant power supply optional)
	Optical Drive	Optional CD, DVD on SATA Models
	Diskette Drive	Optional floppy on SATA Models
	PCI-X Slots	1 full length and 1 half length 64bit/133MHz PCI-X slot
	Form Factor	Rack (1U), (1.75 in/4.45 cm)

Models

DL360R04p X3.4-2MB/800, 1GB SATA 380078-xx1	Processor	(1) Intel Xeon Processor 3.4 GHz/800MHz standard
	Cache Memory	2MB level 2 cache
	Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
	Storage Controller	Embedded SATA controller NOTE: The HP embedded 2 Port SATA controller does not support RAID, hot plug drive functionality or drive activity LEDs. NOTE: SATA RAID 0, 1 is available with the optional purchase of the HP 8-port SAS HBA (347786-B21) and HP SAS/SATA Cable Kit (398307-B21) - hot-plug drive functionality and drive activity LEDs not supported.
	Hard Drives	None ship standard; system supports up to two Serial ATA drives
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
	Power Supply	One 460W power supply (redundant power supply optional)
	Optical Drive	Optional CD, DVD, CD-RW/DVD combo on SATA Models
	Diskette Drive	Optional floppy on SATA Models
	PCI-X Slots	1 full length and 1 half length 64bit/133 MHz PCI-X slot
Form Factor	Rack (1U), (1.75 in/4.45 cm)	

DL360R04p X3.2-2MB/800, 1GB SATA 379752-xx1	Processor	(1) Intel Xeon Processor 3.2 GHz/800MHz standard (up to 2 supported)
	Cache Memory	2MB level 2 cache
	Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
	Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
	Storage Controller	Embedded SATA controller NOTE: The HP embedded 2 Port SATA controller does not support RAID, hot plug drive functionality or drive activity LEDs. NOTE: SATA RAID 0, 1 is available with the optional purchase of the HP 8-port SAS HBA (347786-B21) and HP SAS/SATA Cable Kit (398307-B21) - hot-plug drive functionality and drive activity LEDs not supported.
	Hard Drives	None ship standard; system supports up to two Serial ATA drives
	Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
	Power Supply	One 460W power supply (redundant power supply optional)
	Optical Drive	Optional CD, DVD on SATA Models
	Diskette Drive	Optional floppy on SATA Models
	PCI-X Slots	1 full length and 1 half length 64bit/133 MHz PCI-X slot
Form Factor	Rack (1U), (1.75 in/4.45 cm)	

Models

DL360R04p X3.0-
2MB/800, 1GB SATA
380324-xx1

Processor	(1) Intel Xeon Processor 3.0 GHz/800MHz standard (up to 2 supported)
Cache Memory	2MB level 2 cache
Memory	1 GB (2 x 512 MB) Standard to 12 GB (Maximum) of PC2-3200 DDR2 400 SDRAM
Network Controller	Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter
Storage Controller	Embedded SATA controller NOTE: The HP embedded 2 Port SATA controller does not support RAID, hot plug drive functionality or drive activity LEDs. NOTE: SATA RAID 0, 1 is available with the optional purchase of the HP 8-port SAS HBA (347786-B21) and HP SAS/SATA Cable Kit (398307-B21) - hot-plug drive functionality and drive activity LEDs not supported.
Hard Drives	None ship standard; system supports up to two Serial ATA drives
Remote Management	Integrated Lights-Out (iLO) Standard Management (embedded)
Power Supply	One 460W power supply (redundant power supply optional)
Optical Drive	Optional CD, DVD combo on SATA Models
Diskette Drive	Optional floppy on SATA Models
PCI-X Slots	1 full length and 1 half length 64bit/133 MHz PCI-X slot
Form Factor	Rack (1U), (1.75 in/4.45 cm)

Country Code Key

XX=00
XX=20
XX=29
XX=37
XX=42
XX=AA

Rack Code Key

US
Brazil
Japan
APD
EURO
PRC

Configuration Information - Factory Integrated Models (North America only)

NOTE: For Configure to Order requirements within EMEA region, please consult local Sales Contact.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

Step 1: Base Configuration (choose one of the following configurable models)

Models	<p>HP ProLiant DL360G4p SATA Rack CTO Chassis (North America) 382146-405</p> <p>Factory Integrated Model ships with:</p> <p>Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit NIC Embedded SATA Controller (SATA RAID functionality is available via OS) Integrated Lights-Out (iLO) embedded 1 full length and 1 half length 64-bit/133 MHz PCI-X slot 7 fans; N+1 fan redundancy Rack (1U), (1.75 in/4.45 cm)</p>
	<p>HP ProLiant DL360G4p SCSI Rack CTO Chassis (North America) 382147-405</p> <p>Factory Integrated Model ships with:</p> <p>Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit NIC Smart Array 6i Controller (Ultra320 SCSI, RAID, embedded) Integrated Lights-Out (iLO) embedded 1 full length and 1 half length 64-bit/133 MHz PCI-X slots 1.44MB Diskette Drive 7 fans; N+1 fan redundancy Rack (1U), (1.75 in/4.45 cm)</p>
	<p>HP ProLiant DL360G4p SAS Rack CTO Chassis (North America) 389831-405</p> <p>Factory Integrated Model ships with:</p> <p>Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit NIC Integrated Lights-Out (iLO) embedded 1 full length and 1 half length 64-bit/133 MHz PCI-X slots 7 fans; N+1 fan redundancy Rack (1U), (1.75 in/4.45 cm)</p>

Step 1A: If SAS Model, Choose SAS Starter Kit or Controller (only one of the following)

SAS Controller	<p>HP Smart Array P600 Controller 337972-B21</p> <p>NOTE: This is a required selection if one of the two following SAS Starter Kits is not selected. If choosing this part number, 2.5" SAS hard drives must still be selected under Step 4.</p>
SAS Starter Kit	<p>NOTE: SAS Starter Kits are not compatible with the SCSI or SATA models.</p> <p>SAS Starter Kit - 36GB 396221-B21</p> <p>NOTE: Includes Smart Array P600 Performance Array Controller with 256MB BBWC and (2) 36 GB 2.5" SAS Universal Hard Drives.</p> <p>SAS Starter Kit - 72GB 396220-B21</p> <p>NOTE: Includes Smart Array P600 Performance Array Controller with 256MB BBWC and (2) 72 GB 2.5" SAS Universal Hard Drives.</p>

Configuration Information - Factory Integrated Models (North America only)

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Processors	Intel Dual-core X2.8GHz/800-2x2MB DL360G4 FIO processor	408585-L21
	Intel X2.8GHz/800-2MB DL360G4 FIO processor	399042-L21
	Intel X3.0GHz/800-2MB DL360G4 FIO processor	380327-L21
	Intel X3.0GHz/800-2M LV DL360G4 FIO processor	394921-L21
	Intel X3.2GHz/800-2MB DL360G4 FIO processor	379817-L21
	Intel X3.4GHz/800-2MB DL360G4 FIO processor	376243-L21
	Intel X3.6GHz/800-2MB DL360G4 FIO processor	376242-L21
	Intel X3.8GHz800-2M DL360G4 FIO processor	376241-L21
	NOTE: Dual-core processor is supported on HP ProLiant DL360 G4p Serial Attached SCSI (SAS) model only.	
Base Memory	1 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Memory Kit (2 x 512 MB)	343055-B21
	2 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Memory Kit (2 x 1 GB)	343056-B21
	4 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Memory Kit (2 x 2 GB)	343057-B21
Optical Drive (may or may not be required. See notes)	NOTE: Optical Drives are OPTIONAL if choosing the (389831-405) SAS Rack CTO Chassis Model or (382146-405) SATA Rack CTO Chassis Model in Step 1.	
	NOTE: An Optical Drive is REQUIRED if choosing the 382147-405 SCSI Rack CTO Chassis Model in Step 1.	
	Slimline CD-ROM Drive 24X	356963-B21
	NOTE: This CD-ROM Drive (PN 356963-B21) is for SAS, SCSI, and SATA models.	
	Slimline CD-RW/DVD-ROM Combo Option Kit	331903-B21
	NOTE: This CD-RW/DVD-ROM Drive (PN 331903-B21) is for SAS and SCSI models. It is not supported in SATA models.	
Slimline DVD-ROM Drive (8X/24X) Option Kit	264007-B21	
NOTE: This DVD-ROM Drive (PN 264007-B21) is for SAS and SCSI models. It is not supported in SATA models.		

Step 3: Choose Additional Factory Integratable Options

Diskette Drive	Slimline Ejectable Floppy Drive	390164-B21
	NOTE: This Diskette Drive is for SAS (389831-405) models.	
	1.44 MB Diskette drive	354588-B21
	NOTE: This Diskette Drive is for SATA (382146-405) models	
Optical Drive	NOTE: Optical Drives are OPTIONAL if choosing the (389831-405) SAS Rack CTO Chassis Model or (382146-405) SATA Rack CTO Chassis Model in Step 1.	
	NOTE: An Optical Drive is REQUIRED if choosing the 382147-405 SCSI Rack CTO Chassis Model in Step 1.	
	Slimline CD-ROM Drive 24X	356963-B21
	NOTE: This DVD-ROM Drive (PN 264007-B21) is for SAS and SCSI models. It is not supported in SATA models.	
	Slimline DVD-ROM Drive (8X/24X) Option Kit	264007-B21
	NOTE: This DVD-ROM Drive (PN 264007-B21) is for SAS and SCSI models. It is not supported in SATA models.	
Slimline CD-RW/DVD-ROM Combo Option Kit	331903-B21	
NOTE: This CD-RW/DVD-ROM Drive (PN 331903-B21) is for SAS and SCSI models. It is not supported in SATA models.		

Configuration Information - Factory Integrated Models (North America only)

Power Supply	460W HP redundant power supply with IEC cord only NOTE: For SCSI and SATA Models.	354587-B21
	535W HP redundant power supply with IEC cord only NOTE: For SAS Models.	389830-B21
	535W HP redundant power supply with NEMA or Japan cord only NOTE: for SAS Models.	389830-001

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Options" section below.

Options

NOTE: Some options may not be factory integratable. Please contact your local sales representative for additional information.

<p>HP ProLiant DL360 G4 and ProLiant DL360 G4p Unique Options</p>	<p>Intel Xeon Dual-core 2.8 GHz/800MHz-2x2MB Processor Option Kit NOTE: This processor option kit (PN 408585-B21) supports the HP ProLiant DL360 G4p SAS only.</p> <p>Intel Xeon 2.8G Hz/800MHz-2MB Processor Option Kit NOTE: This processor option kit (PN 399042-B21) supports the HP ProLiant DL360 G4p only.</p> <p>Intel Xeon 3.0 GHz/800MHz-2MB Processor Option Kit NOTE: This processor option kit (PN 380327-B21) supports the HP ProLiant DL360 G4p only.</p> <p>Intel Xeon 3.0 GHz/800MHz-2MB Low Voltage Processor Option Kit NOTE: This processor option kit (PN 394921-B21) supports the HP ProLiant DL360 G4p only.</p> <p>Intel Xeon 3.2 GHz/800MHz-2MB Processor Option Kit NOTE: This processor option kit (PN 379817-B21) supports the HP ProLiant DL360 G4p only.</p> <p>Intel Xeon 3.4 GHz/800MHz-2MB Processor Option Kit NOTE: This processor option kit (PN 376243-B21) supports the HP ProLiant DL360 G4p only.</p> <p>Intel Xeon 3.6 GHz/800MHz-2MB Processor Option Kit NOTE: This processor option kit (PN 376242-B21) supports the HP ProLiant DL360 G4p only.</p> <p>Intel Xeon 3.8 GHz/800MHz-2MB Processor Option Kit NOTE: This processor option kit (PN 376241-B21) supports the HP ProLiant DL360 G4p only.</p> <p>PCI-e Riser option (to convert one or both PCI-X to PCI-e slots)</p> <p>Ambidextrous cable management arm NOTE: Package contains two cable management arms</p> <p>Fixed Cord Extension Bars for 1U servers (2 PDU sticks per kit)</p> <p>460W HP redundant power supply with IEC cord only</p> <p>460W HP redundant power supply with US or Japanese NEMA cord only NOTE: The HP ProLiant DL360 G4p ships with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For stand-alone deployments or installation without a rack, country-specific power cord options are available. U.S., Japan, & APD models ship with two power cords: IEC-IEC and NEMA cords.</p> <p>535W HP redundant power supply with IEC cord only</p> <p>535W HP redundant power supply with US or Japanese NEMA cord only NOTE: The HP ProLiant DL360 G4p ships with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For stand-alone deployments or installation without a rack, country-specific power cord options are available. U.S., Japan, & APD models ship with two power cords: IEC-IEC and NEMA cords.</p> <p>Telco Rack Kit, ProLiant DL360 G4, Japan</p>	<p>408585-B21</p> <p>399042-B21</p> <p>380327-B21</p> <p>394921-B21</p> <p>379817-B21</p> <p>376243-B21</p> <p>376242-B21</p> <p>376241-B21</p> <p>354589-B21</p> <p>365403-B21</p> <p>351655-B21</p> <p>354587-B21</p> <p>354587-001</p> <p>389830-B21</p> <p>389830-001</p> <p>385938-291</p>
--	---	---

ProLiant Essentials Value Pack Software

ProLiant Essentials Integrated Lights-Out Advanced Pack

<p>ProLiant Essentials Integrated Lights-Out Advanced Pack, 1 server Featuring: sophisticated virtual administration features for ultimate control of servers in the data centers and remote sites.</p>	<p>263825-B21</p>
--	-------------------

Options

NOTE: For additional ProLiant Integrated Light-Out Advanced Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11052_div/11052_div.HTML

ProLiant Essentials Intelligent Networking Pack

ProLiant Essentials Intelligent Networking Pack - Windows Edition, Single Server License 372906-B21

NOTE: For use with a single server. Contains one license with a unique license activation key and documentation.

NOTE: For additional ProLiant Intelligent Networking Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12062_div/12062_div.HTML

ProLiant Essentials Intelligent Networking Pack - Linux Edition, Single Server License 397004-B21

NOTE: For additional ProLiant Intelligent Networking Pack - Linux License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12327_div/12327_div.HTML

ProLiant Essentials Performance Management Pack

ProLiant Essentials Performance Management Pack, Single-Server License 306696-B21

NOTE: For use with a single server. Contains one license with a unique license activation key, HP Management CD and documentation.

NOTE: The most recent version of the software can always be downloaded at <http://www.hp.com/products/pmp>.

NOTE: For additional ProLiant Performance Management Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11925_div/11925_div.HTML

ProLiant Essentials Rapid Deployment Pack Windows Edition and Linux Edition Release

Rapid Deployment Pack, Single-Server License 267196-B21

NOTE: This license allows 1 server to be deployed and managed via RDP.

Rapid Deployment Pack, Single-Server License (Japan) 267196-291

NOTE: This license allows 1 server to be deployed and managed via RDP.

NOTE: For additional ProLiant Essentials Rapid Deployment Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11053_div/11053_div.HTML

http://h18000.www1.hp.com/products/quickspecs/11713_div/11713_div.HTML

ProLiant Essentials Workload Management Pack

ProLiant Essentials Workload Management Pack, Single Server License 303284-B21

NOTE: For additional ProLiant Workload Management Pack License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11452_div/11452_div.HTML

ProLiant Essentials Virtualization Management Software

ProLiant Essentials Virtual Machine Management Pack, Single-Server License 372214-B21

NOTE: For use with a single server. Contains one license with a unique license activation key and documentation.

ProLiant Essentials Server Migration Pack, Single-Migration License 375345-B21

NOTE: Contains one license, enabling 1 server migration, with a unique license activation key and documentation.

Options

NOTE: This license allows 1 server to be migrated from a physical server to a virtual machine. Or this license can be used to migrate a virtual machine from one virtualization layer i.e. VMware GSX to a different virtualization layer such as VMware ESX or Microsoft Virtual Server 2005.

NOTE: For additional ProLiant Essentials Virtualization Management Software License Kits please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12328_div/12328_div.HTML

ProLiant Essentials Vulnerability and Patch Management Pack

ProLiant Essentials Vulnerability and Patch Management Pack, Single-Server License 371645-B21

NOTE: For use with a single server. Contains one license with a unique license activation key and documentation.

NOTE: For additional ProLiant Vulnerability and Patch Management Pack License Kits, please see the QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/12111_div/12111_div.HTML

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessentials>.

ProLiant Software Maintenance Subscription	ProLiant Software Maintenance Subscription	355060-B21
	ProLiant Software Maintenance Single Release	356573-B21
	ProLiant Foundation Pack Single Release	356604-B21

NOTE: Please see the SmartStart QuickSpecs for additional information regarding the subscription purchase:
<http://h18000.www1.hp.com/products/quickspecs/Division/11073.html>
 (Worldwide)
http://h18000.www1.hp.com/products/quickspecs/North_America/11073.html
 (North America)

Processor	Intel Xeon Dual-core 2.8 GHz/800MHz-2x2MB Processor Option Kit	408585-B21
	NOTE: This processor option kit (PN 408585-B21) supports the HP ProLiant DL360 G4p SAS only.	
	Intel Xeon 2.8 GHz/800MHz-2MB Processor Option Kit	399042-B21
	NOTE: This processor option kit (PN 399042-B21) supports the HP ProLiant DL360 G4p only.	
	Intel Xeon 3.0 GHz/800MHz-2MB Processor Option Kit	380327-B21
	NOTE: This processor option kit (PN 380327-B21) supports the HP ProLiant DL360 G4p only.	
Intel Xeon 3.0 GHz/800MHz-2MB Processor Option Kit, Low Voltage	394921-B21	
NOTE: This processor option kit (PN 394921-B21) supports the HP ProLiant DL360 G4p only.		
Intel Xeon 3.2 GHz/800MHz-2MB Processor Option Kit	379817-B21	
NOTE: This processor option kit (PN 379817-B21) supports the HP ProLiant DL360 G4p only.		
Intel Xeon 3.4 GHz/800MHz-2MB Processor Option Kit	376243-B21	
NOTE: This processor option kit (PN 376243-B21) supports the HP ProLiant DL360 G4p only.		

Options

Intel Xeon 3.6 GHz/800MHz-2MB Processor Option Kit 376242-B21
NOTE: This processor option kit (PN 376242-B21) supports the HP ProLiant DL360 G4p only.

Intel Xeon 3.8 GHz/800MHz-2MB Processor Option Kit 376241-B21
NOTE: This processor option kit (PN 376241-B21) supports the HP ProLiant DL360 G4p only.

Memory (DIMMs)

1 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Memory Kit (2 x 512 MB) 343055-B21

2 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Memory Kit (2 x 1 GB) 343056-B21

4 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Single Rank Memory Kit (2 x 2 GB) 343057-B21

4 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Dual Rank Memory Kit (2 x 2 GB) 375004-B21

Optical Drives

Slimline CD-RW/DVD-ROM Combo Option Kit 331903-B21
NOTE: This CD-RW/DVD-ROM Drive (PN 331903-B21) is for SCSI and SAS models only. It is not supported in SATA models.

Slimline DVD-ROM Drive (8X/24X) Option Kit (Servers) 264007-B21
NOTE: This DVD-ROM Drive (PN 264007-B21) is supported on SCSI and SAS models.

Slimline CD-ROM Drive 24X 356963-B21
NOTE: This CD-ROM Drive (PN 356963-B21) is for SAS, SCSI, and SATA models.
NOTE: Ships standard in some SCSI and SAS models.

HP DVD+R/RW 8X Slim 383975-B21
NOTE: This DVD+R/RW 8X Slim (PN 383975-B21) is supported on SCSI and SAS models.

Diskette Drive

Slimline Ejectable Floppy drive 390164-B21
NOTE: This Diskette Drive is for SAS models only.

1.44 MB Diskette Drive 354588-B21
NOTE: This 1.44MB Diskette Drive (PN 354588-B21) is supported on SCSI and SATA models only.
NOTE: Ships standard in SCSI models.

Options

Hard Drives

Ultra320 – Universal Hot Plug

NOTE: The HP ProLiant DL360 G4p SCSI models support U320 Universal Hot Plug drives.

300-GB Ultra320 SCSI 10,000 rpm Universal Hard Drive (1")	350964-B22
146.8-GB Ultra320 SCSI 10,000 rpm Universal Hard Drive (1")	286716-B22
72.8-GB Ultra320 SCSI 10,000 rpm Universal Hard Drive (1")	286714-B22
146.8-GB Ultra320 SCSI 15,000 rpm Universal Hard Drive (1")	347708-B22
72.8-GB Ultra320 SCSI 15,000 rpm Universal Hard Drive (1")	286778-B22
36.4-GB Ultra320 SCSI 15,000 rpm Universal Hard Drive (1")	286776-B22

NOTE: Please see the Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

http://h18000.www1.hp.com/products/quickspecs/11531_div/11531_div.HTML
(Worldwide)

http://h18000.www1.hp.com/products/quickspecs/11531_na/11531_na.HTML
(North America)

Serial-ATA (SATA) Hot Plug Hard Drive (For use with SATA Models)

NOTE: The HP embedded 2 Port SATA controller does not support RAID, hot plug drive functionality or drive activity LEDs.

NOTE: SATA drives have a 1 year warranty.

80-GB SATA 1.5 Gb 7,200 rpm Hard Drive (3.5")	349237-B21
160-GB SATA 1.5 Gb 7,200 rpm Hard Drive (3.5")	349238-B21
250-GB SATA 1.5 Gb 7,200 rpm Hard Drive (3.5")	349239-B21
500-GB SATA 1.5 Gb 7,200 rpm Hard Drive (3.5")	395473-B21
60-GB SATA 1.5 Gb 5,400 rpm Hard Drive (2.5")	379306-B21

NOTE: Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.HTML
(Worldwide)

http://h18000.www1.hp.com/products/quickspecs/11940_na/11940_na.HTML
(North America)

Serial Attached SCSI (SAS) 2.5" Hot Plug (For use with SAS Models)

HP 72 GB SAS 10,000 rpm Hard Drive (2.5")	375861-B21
HP 36 GB SAS 10,000 rpm Hard Drive (2.5")	375859-B21

NOTE: All SFF SAS Universal Hard Drives are supported ONLY by HP ProLiant DL360 G4p SAS models.

NOTE: Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

http://h18000.www1.hp.com/products/quickspecs/12224_div/12224_div.HTML
(Worldwide)

http://h18000.www1.hp.com/products/quickspecs/12224_na/12224_na.HTML
(North America)

Storage Controllers

SCSI Controllers

128MB Battery Backed Write Cache Enabler Option Kit	346914-B21
---	------------

NOTE: Upgrade for Smart Array 6i Controller.

Options

Smart Array 6402/128 Controller	273915-B21
NOTE: For support of external drives only.	
Smart Array 6404/256 Controller	273914-B21
NOTE: For support of external drives only.	
Smart Array 642 Controller	291967-B21
NOTE: For support of external drives only.	
128MB Battery-Backed Cache Enabler	351580-B21
NOTE: This 128MB BBWC supports the Smart Array 641 Controller and Smart Array 642 Controller.	
64-Bit/66-MHz Dual Channel Wide Ultra3 SCSI Adapter, Alternate OS	284688-B21
64-Bit/133-MHz Dual Channel Ultra320 SCSI Adapter	268351-B21
NOTE: For support of external drives only.	
Ultra320 Expansion Module for SA-6402	273911-B21
NOTE: For support of external drives only.	
64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2	374654-B21
NOTE: Please see the following Controller or SCSI Adapter QuickSpecs for Technical Specifications such as PCI Bus, PCI Peak Data Transfer Rate, SCSI Protocols supported, SCSI Peak Data Transfer Rate, Channels, SCSI Ports, Drives supported, Cache, RAID support, and additional information: http://h18000.www1.hp.com/products/quickspecs/12030_div/12030_div.HTML (Smart Array 6i) http://h18000.www1.hp.com/products/quickspecs/11587_div/11587_div.HTML (Smart Array 6400 Series) http://h18000.www1.hp.com/products/quickspecs/11563_div/11563_div.HTML (Smart Array 642) http://h18000.www1.hp.com/products/quickspecs/10429_div/10429_div.HTML (SCSI Adapter) http://h18000.www1.hp.com/products/quickspecs/11555_div/11555_div.HTML (U320 Adapter) http://h18000.www1.hp.com/products/quickspecs/11943_div/11943_div.HTML (U320 SCSI HBA)	
SAS Controller	
HP Smart Array P600 Controller	337972-B21
512MB DDR BBWC Upgrade	372538-B21
NOTE: Ships standard with SAS model.	
NOTE: Please see the following Controller QuickSpecs for Technical Specifications such as PCI Bus, PCI Peak Data Transfer Rate, SCSI Protocols supported, SCSI Peak Data Transfer Rate, Channels, SCSI Ports, Drives supported, Cache, RAID support, and additional information: http://h18000.www1.hp.com/products/quickspecs/12247_div/12247_div.HTML (Smart P600 Controller)	
SAS HBA	
HP 8 Internal Port SAS HBA with RAID	347786-B21
NOTE: Supports SAS/SATA models. RAID 0,1 supported.	
NOTE: Please see the HBA QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/12332_div/12332_div.HTML	
HP SATA/SAS 1U Cable Kit	398307-B21
NOTE: Required for HP SAS/SATA HBA use with HP ProLiant DL360 G4p SAS or SATA models.	

Options

Communications	HP NC150T PCI 4-port Gigabit 1000T Combo Switch Adapter	367132-B21
	HP NC310F PCI-X 1000SX Gigabit Server Adapter	368169-B21
	HP NC320T PCI Express 1000T Gigabit Server Adapter	367047-B21
	HP NC370F PCI-X Multifunction 1000SX Gigabit Server Adapter	374193-B22
	HP NC370T PCI-X Multifunction 1000T Gigabit Server Adapter	374191-B22
	HP NC1020 PCI 1000T Gigabit Server Adapter	353377-B21
	HP NC7170 PCI-X Dual Port 1000T Gigabit Server Adapter	313881-B21
	HP NC7771 PCI-X 1000T Gigabit Server Adapter	290563-B21
	NOTE: A minimum of 1 GB of memory is required for NC370x adapters, with a maximum of two NC370x adapters permitted in a server.	
	NOTE: Any NIC (except the NC1020) on the option list can be used for redundancy with the embedded NC7782 Dual Port Network Controller. When teaming with other NICs or with the embedded NIC, the lack of Jumbo Frames and LSO features on the NC1020 will cause high end NICs to have those features disabled. (e.g. incompatibility issues with the other option NICs for that platform).	
	HP NC570C PCI-X Dual-port 4x Fabric Adapter	376158-B21
	HP NC571C PCI Express Dual-port 4x Fabric Adapter	376160-B21
	HP 24-Port 4x Fabric Copper Switch	376227-B21
	HP 1m 4x Fabric Copper Cable	376232-B21
HP 3m 4x Fabric Copper Cable	376232-B22	
HP 5m 4x Fabric Copper Cable	376232-B23	

Management Options	Remote Insight Lights-Out Edition II (NA, LA)	227251-001
	Remote Insight Lights-Out Edition II (EMEA)	227251-021
	Remote Insight Lights-Out Edition II (ROW)	227251-371

High Performance Solutions	HPCC Myrinet Fiber NIC	257894-006
-----------------------------------	------------------------	------------

Tape Drives

NOTE: For the complete listing of Tape Drive offerings, please see: <http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

For recommended tape drive offerings for this ProLiant server see the following:

USB Tape Drives

HP StorageWorks DAT 40 USB External Tape Drive (Carbonite)	DW023A
HP StorageWorks DAT 72 USB External Tape Drive (Carbonite)	DW027A

Ultrium Tape Drives - External, Rack-Mount and Array

HP StorageWorks Ultrium 232 External Tape Drive (Carbonite)	DW065B
HP StorageWorks Ultrium 232 Internal Tape Drive (Carbonite)	DW064A

NOTE: No internal tape drives fit inside the HP ProLiant DL360 G4p. The internal drive shown here is for the 1U or 3U Rack-mount Kit.

HP StorageWorks Ultrium 448 External Tape Drive (Carbonite)	DW017B
HP StorageWorks 1U Rack-mount kit with one Ultrium 448 (Carbonite)	DW028A

Options

NOTE: Please see the HP StorageWorks Ultrium Tape Drive QuickSpecs for additional options such as controllers, media, and other related items:

http://h18006.www1.hp.com/products/quickspecs/11739_div/11739_div.html
(Worldwide)

http://h18006.www1.hp.com/products/quickspecs/11739_na/11739_na.html
(North America)

http://h18006.www1.hp.com/products/quickspecs/12128_div/12128_div.html
(Worldwide)

http://h18006.www1.hp.com/products/quickspecs/12128_na/12128_na.html
(North America)

For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>

DAT Drives - External, Rack-Mount and Array Module

HP StorageWorks DAT 72 SCSI External Tape Drive (Carbon) Q1523B

HP StorageWorks 1U Rack-mount kit with one DAT 72 (Carbon) A7443A

NOTE: Please see the DAT Tape Drive QuickSpecs for controllers, media, and other options:

http://h18000.www1.hp.com/products/quickspecs/11883_div/11883_div.HTML
(Worldwide)

http://h18000.www1.hp.com/products/quickspecs/11883_na/11883_na.HTML
(North America)

For an up-to-date listing of the latest O/S and software support details for HP DAT drives, please visit: <http://www.hp.com/go/connect>

Rack-Mount Tape Drive Enclosures

HP StorageWorks 1U Rack-Mount Kit A7445B

NOTE: The 1U Rack-mount Kit can support up to 2 half-height tape drives and is compatible with multiple Single-Ended and LVD SCSI tape drives including DAT 24, DAT 40, DAT 72, DLT VS80, DLT VS160, Ultrium 215, Ultrium 232, and Ultrium 448 tape drives.

HP StorageWorks 1U USB Rack-Mount Kit A8007A

1U USB Cable Option Kit 396114-B21

NOTE: Converts a 1U SCSI rack-mount kit to a USB interface to support the USB tape drives.

HP StorageWorks 3U Rack-Mount Kit 274338-B23

NOTE: The 3U Rack-mount Kit can support up to (2) full-height or (4) half-height tape drives and compatible with multiple Single-Ended and LVD SCSI tape drives including DAT 24, DAT 40, DAT 72, DLT VS80, DLT VS160, SDLT 320, SDLT 600, Ultrium 215, Ultrium 230, Ultrium 232, Ultrium 460, Ultrium 448 and Ultrium 960 tape drives.

NOTE: Please see the Rack-Mount Tape Drive Kits QuickSpecs for additional information regarding these kits:

http://h18000.www1.hp.com/products/quickspecs/10854_div/10854_div.HTML
(Worldwide)

http://h18000.www1.hp.com/products/quickspecs/10854_na/10854_na.HTML
(North America)

Options

Tape Autoloaders

DAT Autoloader

HP StorageWorks DAT 72x6 Autoloader (External)

Q1567A

NOTE: Please see the DAT 72x6 Tape Autoloader QuickSpecs for additional options such as host bus adapters, controllers and media:

http://h18006.www1.hp.com/products/quickspecs/11905_div/11905_div.html
(Worldwide)

http://h18006.www1.hp.com/products/quickspecs/11905_na/11905_na.html
(North America)

HP StorageWorks 1/8 Tape Autoloader

HP StorageWorks 1/8 Ultrium 960 Tape Autoloader

AF204A

HP StorageWorks 1/8 Ultrium 448 Tape Autoloader

AF203A

HP StorageWorks 1/8 SDLT 320 Tape Autoloader

AA926A

HP StorageWorks 1/8 Ultrium 232 Tape Autoloader

AF202A

1/8 Tape Autoloader Rackmount Kit

C9268R

NOTE: Required to install the 1/8 tape autoloader in a standard 19-inch rack.

NOTE: Please reference the 1/8 Tape Autoloader QuickSpecs at

<http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at

<http://www.hp.com/go/ebs>.

HP StorageWorks SSL1016 Tape Autoloader

HP StorageWorks SSL1016 Ultrium 460 Tape Autoloader

330821-B21

HP StorageWorks SSL1016 SDLT 320 Tape Autoloader

330816-B21

NOTE: Please reference the SSL1016 Tape Autoloader QuickSpecs at

<http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at

<http://www.hp.com/go/ebs>.

Tape Libraries

HP StorageWorks MSL2024 Tape Library

HP StorageWorks MSL2024 1 Ultrium 960 Drive Library

AG115A

HP StorageWorks MSL2024 1 Ultrium 448 Drive Library

AG116A

HP StorageWorks MSL2024 2 Ultrium 448 Drive Library

AG117A

HP StorageWorks MSL6000 Tape Library

Ultrium 960 technology

HP StorageWorks MSL6030 1 Ultrium 960 Dr LVDS Library

AD606A

HP StorageWorks MSL6030 1 Ultrium 960 Dr FC Library

AD608A

HP StorageWorks MSL6030 2 Ultrium 960 Dr LVDS Library

AD607A

HP StorageWorks MSL6030 2 Ultrium 960 Dr FC Library

AD609A

Ultrium 460 technology

HP StorageWorks MSL6030 1 Ultrium 460 Dr LVDS Library

AD598A

HP StorageWorks MSL6030 1 Ultrium 460 Dr FC Library

AD600A

HP StorageWorks MSL6030 2 Ultrium 460 Dr LVDS Library

AD599A

HP StorageWorks MSL6030 2 Ultrium 460 Dr FC Library

AD601A

NOTE: Please reference the MSL2024 and MSL6000 Tape Library QuickSpecs at

<http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at

<http://www.hp.com/go/ebs>.

Options

Magneto-Optical Jukeboxes	HP StorageWorks 9.1 GB Optical Jukeboxes	
	600mx, 4 drive, 64 slot jukebox	C1160M
	1200mx, 4 drive, up to 128 slots	C1104M
	2200mx, 6 drive, up to 238 slots	C1107M
	<p>NOTE: Please see the HP StorageWorks Magneto-Optical Products data sheet for a complete listing of available jukeboxes at: http://www.hp.com/products1/storage/products/archivalprod/brochures/MO_family_pb.pdf</p> <p>NOTE: Please reference the Magneto-Optical Jukebox data sheets at http://www.hp.com/go/optical for additional information needed to create a complete solution.</p>	
Ultra Density Optical Jukeboxes	1900ux, 4 drive, 64 slot jukebox	AA966A
	3800ux, 4 drive, 128 slot jukebox	AA969A
	7100ux, 6 drive, 238 slot jukebox	AA971A
	<p>NOTE: Please see the HP StorageWorks Ultra Density Optical Jukeboxes QuickSpecs for a complete listing of available jukeboxes at: http://h18006.www1.hp.com/products/quickspecs/11944_div/11944_div.html</p> <p>NOTE: Please reference the Ultra Density Optical Jukebox QuickSpecs at http://www.hp.com/go/optical for additional information needed to create a complete solution</p>	
Power Cords	<p>NOTE: The HP ProLiant DL360 G4p ships with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For stand-alone deployments or installation without a rack, country-specific power cord options are available. U.S. & Japan models will ship with two power cords: IEC-IEC (142257-002) and North American C13-Nema 5-15P (103541-001) cords.</p>	
	Power Cord, Euro, 10A 250 V Straight (12 ft/3.7 m)	157215-021
	Power Cord, UK, 10A 250 V Straight (12 ft/3.7 m)	157216-031
	Power Cord, Danish, 10A 250 V Straight (12 ft/3.7 m)	157218-081
	Power Cord, Swiss, 10A 250 V Straight (12 ft/3.7 m)	157219-111
	Power Cord, Italian, 10A 250 V Straight (12 ft/3.7 m)	157217-061
	Power Cord, South Africa, 10A 250 V Straight (12 ft/3.7 m)	157220-AR1
	HP StorageWorks Modular Smart Array 20	HP StorageWorks Modular Smart Array 20
<p>NOTE: Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies.</p>		
HP StorageWorks Modular Smart Array 20 Starter Kit		366172-B21
<p>NOTE: Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies. Includes Smart Array 6402/128 Controller.</p> <p>NOTE: The Modular Smart Array Enclosure 20 Family supports the SATA 1.5Gb/s 1" Hot Plug Hard Drives.</p>		

Options

HP StorageWorks Modular Smart Array 30	HP StorageWorks Modular Smart Array 30 SB NOTE: Rack-mountable 14 drive enclosure with single bus, redundant power supplies HP StorageWorks Modular Smart Array 30 DB NOTE: Rack-mountable 14 drive enclosure with dual bus, redundant power supplies NOTE: The Modular Smart Array Enclosure 30 Family supports the Wide Ultra3, Ultra320 1" Hot Plug Hard Drives.	302969-B21 302970-B21
HP StorageWorks Modular Smart Array 50	HP StorageWorks Modular Smart Array 50 Enclosure NOTE: Please see the Modular Smart Array 50 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/12245_na/12245_na.HTML (North America) http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.HTML (Worldwide)	364430-B21
HP StorageWorks Modular Smart Array 500	HP StorageWorks Modular Smart Array 500 Generation 2 NOTE: Please see the Modular Smart Array 500 Generation 2 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/11956_na/11956_na.HTML (North America) http://h18000.www1.hp.com/products/quickspecs/11956_div/11956_div.HTML (Worldwide)	335880-B21
HP StorageWorks Modular Smart Array 1000	HP StorageWorks Modular Smart Array 1000 NOTE: Please see the Modular Smart Array 1000 QuickSpecs for additional options and configuration information at http://h18000.www1.hp.com/products/quickspecs/11033_na/11033_na.HTML (North America) http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML (Worldwide)	201723-B22
HP StorageWorks Modular Smart Array 1500 cs	Modular Smart Array 1500 Controller Shelf NOTE: Please see the StorageWorks Modular SAN Array 1500 cs QuickSpecs for additional options and configuration information at: http://www.hp.com/go/MSA1500cs	AA986A

Options

StorageWorks Options	StorageWorks 2 Gb, 64-bit/133 MHz PCI-X-to-Fibre Channel Host Bus Adapter for Windows 2000, Windows Server 2003 and Linux NOTE: FCA2214 2 Gb Fibre Channel Host Bus Adapter is a single channel, 64-bit/133 MHz PCI-X-to Fibre Channel Host Bus Adapter (HBA) with an embedded multi-mode optical interface	281541-B21
	FCA2404DC - HP StorageWorks 2 Gb, Dual Channel, 133 MHz PCI-X-to-Fibre Channel Host Bus Adapter for Windows® 2000, and Windows Server 2003 NOTE: FCA2404DC HP StorageWorks 2 Gb Fibre Channel Host Bus Adapter is a dual channel, 133 MHz, PCI-X to Fibre Channel Host Bus Adapter (HBA) with an embedded multi-mode optical interface.	323264-B21
	FCA2404 - StorageWorks 2 Gb, single channel, 133 MHz PCI-X-to-Fibre Channel Host Bus Adapter for Windows 2000, Windows NT and Windows Server 2003 NOTE: FCA2404 StorageWorks 2 Gb, Fibre Channel Host Bus Adapter is a single channel, multi-path failover, 133 MHz, PCI-X to Fibre Channel Host Bus Adapter (HBA) with an embedded multi-mode optical interface for ProLiant Server connects	305573-B21
	StorageWorks 2 Gb, Dual Port, 64-Bit/133 MHz PCI-X-to-Fibre Channel Host Bus Adapter for W2K, Windows Server 2003 and Linux NOTE: FCA2214DC StorageWorks 2 Gb Dual Port, Fibre Channel Host Bus Adapter is a 64-bit/133 MHz, PCI-X-to Fibre Channel Host Bus Adapter (HBA) with an embedded multi-mode optical interface.	321835-B21
	StorageWorks SAN Switch 2/8-EL Upgrade	325888-B21
	StorageWorks SAN Switch 2/16-EL Upgrade	325889-B21
	StorageWorks SAN Director 64	254512-B21

Cluster Options	ProLiant Cluster Starter Kit NOTE: For additional information regarding the ProLiant Cluster Starter Kit please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11935_na/11935_na.html (North America) http://h18000.www1.hp.com/products/quickspecs/11935_div/11935_div.html (Worldwide)	364023-B21
	ProLiant Cluster Kit with OpenView Storage Mirroring NOTE: For additional information regarding the ProLiant Cluster Kit with OpenView Storage Mirroring please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11934_na/11934_na.html (North America) http://h18000.www1.hp.com/products/quickspecs/11934_div/11934_div.html (Worldwide)	364025-B21
	HP HA/F200 for Entry SAN Cluster	364026-B22
	HP HA/F200 for Entry SAN Cluster (Japan) NOTE: For additional information regarding the ProLiant Cluster for Entry Level SAN please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11932_na/11932_na.html (North America) http://h18000.www1.hp.com/products/quickspecs/11932_div/11932_div.html (Worldwide)	364026-292
	ProLiant Cluster HA/F500 for the Enterprise SAN	364024-B21

Options

NOTE: For additional information regarding the ProLiant Cluster HA/F500 for Enterprise SAN please see the following QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11933_na/11933_na.html
(North America)

http://h18000.www1.hp.com/products/quickspecs/11933_div/11933_div.html
(Worldwide)

HP Serviceguard for Linux ProLiant Cluster A.11.15 for SUSE SLES 8 / UnitedLinux 1.0 and Red Hat EL 3 (2 node license cluster kit) 305199-B24

HP Serviceguard for Linux ProLiant Cluster A.11.16 for SUSE SLES 9 and Red Hat EL & 4 (2 node license cluster kit) 305199-B26

HP Serviceguard for Linux License A.11.15 for SUSE SLES 8 / UnitedLinux 1.0 and Red Hat EL 3 (single license version) 307754-B24

HP Serviceguard for Linux A.11.16 for SUSE SLES9 and Red Hat EL 3 & 4 (single license version) 307754-B26

NOTE: For additional information regarding HP Serviceguard for Linux, please see the following QuickSpecs at:

http://h18000.www1.hp.com/products/quickspecs/11518_na/11518_na.html
(North America)

http://h18000.www1.hp.com/products/quickspecs/11518_div/11518_div.html
(Worldwide)

Uninterruptible Power Systems – Rack Mountable

HP UPS R1500 XR (1440VA, 1340 Watt), Low Voltage (NA) 204404-001

HP UPS R1500 XR (1500VA, 1340 Watt), High Voltage (Int'l) 204404-B31

HP UPS R1500 XR (1500VA, 1340 Watt), Low Voltage (Japan) 204404-291

HP UPS R3000 XR (2880VA, 2700 Watt), Low Voltage (NA) 192186-001

HP UPS R3000 XR (3000VA, 2700 Watt), High Voltage (NA) 192186-002

HP UPS R3000 XR (2400VA, 2250 Watt), Low Voltage (Japan) 192186-291

HP UPS R3000 XR (3000VA, 2700 Watt), High Voltage (Japan) 192186-292

HP UPS R3000 XR (3000VA, 2700 Watt), High Voltage (Int'l - detachable cord) 192186-B31

HP UPS R3000 XR (3000VA, 2700 Watt), High Voltage (16A IEC309 Plug) 192186-B32

HP UPS R3000 XR (3000VA, 2700 Watt), High Voltage (16A CEE 7/7 SCHUKO Plug) 192186-B33

HP UPS R3000 XR (3000VA, 2700 Watt), High Voltage (16A BS-546 Plug) 192186-AR1

HP UPS R5500 XR, (5000VA, 4500 Watt), High Voltage (NA/Jpn) 326529-D71

HP UPS R5500 XR, (6000VA, 5400 Watt), High Voltage (Int'l) 326529-B31

HP UPS R12000 XR, N+ x (12KVA, 12KW) High Voltage (WW) 207552-B22

NOTE: UPS R12000 has a hardwired input and output connection.

Options

HP Monitored Power Distribution Unit (PDU)		HP Monitored Power Distribution Unit: Full Rack Version	
		HP Power Distribution Unit with Power Monitoring Model S2324 - dual input, 3 phase, 24A (NA/JPN)	370959-D71
		HP Power Distribution Unit with Power Monitoring Model S1324 - single input, 3 phase, 24A (NA/JPN)	370960-D71
		HP Power Distribution Unit with Power Monitoring Model S2140 - dual input, 1 phase, 40A (NA/JPN)	370961-D71
		HP Power Distribution Unit with Power Monitoring Model S1140 - single input, 1 phase, 40A (NA/JPN)	370962-D71
		HP Power Distribution Unit with Power Monitoring Model S2316 - dual input, 3 phase, 16A (INTL)	370963-B31
		HP Power Distribution Unit with Power Monitoring Model S1316 - single input, 3 phase, 16A (INTL)	370964-B31
		HP Power Distribution Unit with Power Monitoring Model S2132 - dual input, 1 phase, 32A (INTL)	370965-B31
		HP Power Distribution Unit with Power Monitoring Model S1132 - single input, 1 phase, 32A (INTL)	370966-B31
<hr/>			
Modular PDUs 1U/0U (Up to 32 outlets) NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks).		Fixed Cord Extension Bars	351655-B21
		NOTE: Two extension bar sticks; each with (7) C13 plugs.	
		Fixed Cord PDU (NA/JPN)	351655-D72
		NOTE: Four Fixed Cord Extension Bars, and one 24A, HV mPDU L6-30P core.	
		Fixed Cord PDU (INTL)	351655-B31
		NOTE: Four Fixed Cord Extension Bars, and one 32A, HV mPDU IEC-309 core.	
		HP Modular Power Distribution Units (mPDU), Low Volt Model, 24A (100-127 VAC) (NA, Japan)	252663-D71
		NOTE: This mPDU (252663-D71) may also be used to connect the low volt model of the UPS R3000 XR.	
		HP Modular Power Distribution Units (mPDU), High Volt Model, 24A (200-240 VAC) (NA, Japan)	252663-D72
		HP Modular Power Distribution Units (mPDU), High Volt Model, 32A (200-240 VAC) (Int'l)	252663-B31
	HP Modular Power Distribution Units (mPDU), High Volt Model, 40A (200-240 VAC) (WW)	252663-B21	
	NOTE: This mPDU (252663-B21), 40A model has a hardwired input.		
	HP Modular Power Distribution Unit(mPDU), High Volt Model, 16A (200-240 VAC) (WW)	252663-B24	
	HP Modular Power Distribution Unit (mPDU), High Volt Model, 40A, Attached Cord, (NA/JPN)	252663-D73	
	HP Modular Power Distribution Unit (mPDU), High Volt Model, 40A, Attached Cord, (Int'l)	252663-B32	
	NOTE: This PDU has a detachable input power cord and allows for adaptability to country specific power requirements. This model may also be used with the high volt UPSs R3000 XR and R6000 For North America, need to order cable PN 340653-001.		

Options

NOTE: Please see the following Modular Power Distribution Unit (Zero-U/1U Modular PDUs) QuickSpecs for additional options including shorter jumper cables and country specific power cords:

http://h18000.www1.hp.com/products/quickspecs/11041_na/11041_na.HTML
(North America)

http://h18000.www1.hp.com/products/quickspecs/11041_div/11041_div.HTML
(Worldwide)

USB Options	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	USB 1.44-MB External Diskette Drive (Carbonite)	DC141B
	256MB HP Drive Key II (USB 2.0)	PH657A
HP ProLiant DL360 G4p Deployment Options	460W HP redundant power supply with IEC cord only	354587-B21
	460W HP redundant power supply with US or Japanese NEMA cord only	354587-001
	NOTE: The HP ProLiant DL360 G4p ships with a single IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For stand-alone deployments or installation without a rack, country-specific power cord options are available. U.S., Japan, & APD models ship with two power cords: IEC-IEC and NEMA cords.	
	535W HP redundant power supply with IEC cord only	389830-B21
	535W HP redundant power supply with US or Japanese NEMA cord only	389830-001
NOTE: The HP ProLiant DL360 G4p ships with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). For stand-alone deployments or installation without a rack, country-specific power cord options are available. U.S., Japan, & APD models ship with two power cords: IEC-IEC and NEMA cords.		
Telco Rack Kit	Telco Rack Kit, ProLiant DL360 G4, Japan	385938-291
Third Party Rack Kit	Rack Adapter Kit NOTE: This kit allows HP rack servers to fit in racks that are 24" wide.	332815-B21
HP Rack 5000 Series (Graphite Metallic)	HP 5642 Rack Unassembled	358254-B21
Rack Options for Rack 5000 Series	Stabilizer Kit for 5642 rack (Graphite Carbon) NOTE: The stabilizing kit is used to prevent rack from tipping over.	374493-B21
	Baying Kit for 5642 rack (Graphite Carbon) NOTE: The baying kit is used to join two or more HP 5642 racks.	374499-B21

Options

HP Rack 10000 Series (Graphite Metallic)	10642 (42U) Infrastructure Rack (Low Voltage)	379006-001
	10642 (42U) Infrastructure Rack (High Voltage)	379005-001
	HP Rack S10614 (14U) Rack Cabinet - Shock Pallet	292302-B22
	HP Rack 10842 (42U, 800mm wide) – Pallet	257415-B21
	HP Rack 10842 (42U, 800mm wide) – Shock Pallet	257415-B22
	HP Rack 10647 (47U) – Pallet	245160-B21
	HP Rack 10647 (47U) – Crated	245160-B23
	HP Rack 10642 (42U) – Pallet	245161-B21
	HP Rack 10642 (42U) – Shock Pallet	245161-B22
	HP Rack 10642 (42U) – Crated	245161-B23
	HP Rack 10636 (36U) – Pallet	245162-B21
	HP Rack 10636 (36U) – Shock Pallet	245162-B22
	HP Rack 10636 (36U) – Crated	245162-B23
	HP Rack 10622 (22U) – Pallet	245163-B21
	HP Rack 10622 (22U) – Shock Pallet	245163-B22
	HP Rack 10622 (22U) – Crated	245163-B23

NOTE: -B21 (pallet) used to ship empty racks shipped on a truck
-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels)
-B23 (crated) used for air shipments of empty racks

NOTE: It is mandatory to use a shock pallet in order to ship racks with equipment installed. Not all HP equipment is qualified to be shipped in the Rack 10000 series

NOTE: Please see the Rack 10000 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:

http://h18000.www1.hp.com/products/quickspecs/10995_div/10995_div.HTML
(Worldwide)

http://h18000.www1.hp.com/products/quickspecs/10995_na/10995_na.HTML
(North America)

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://h18000.www1.hp.com/products/servers/proliantstorage/rack-options/index.html>.

Options

Rack Options for Rack 10000 Series	HP Rack Light Kit (Neon)	361589-B21	
	HP Rack Plinth Kit (Carbon)	251960-B21	
	42U Side Panel - Graphite Metallic	246099-B21	
	36U Side Panel - Graphite Metallic	246102-B21	
	47U Side Panel - Graphite Metallic	255486-B21	
	TFT7210R Rack Mounted 17" Monitor	348373-B21	
	NOTE: For a complete list of Monitors please view the following URL: http://h18004.www1.hp.com/products/monitors/ .		
	TFT5600 Rack Keyboard Monitor	221546-xx1	
	NOTE: For a complete list of Monitors please view the following URL: http://h18004.www1.hp.com/products/monitors/ .		
	1U Rack Keyboard & Drawer (Carbon)	257054-xx1	
Country Code Key (for TFT5600 Rack Keyboard Monitor (PN 221546-xx1 and for 1U Rack Keyboard & Drawer (PN 257054-xx1)			
XX = 00	US	XX = 09	Norway
XX = 03	UK	XX = 10	Sweden/Finland
XX = 04	Germany	XX = 11	Switzerland
XX = 05	France	XX = 13	Portugal
XX = 06	Italy	XX = 18	Belgium
XX = 07	Spain	XX = 29	Japan
XX = 08	Denmark	XX = B3	International
NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://h18000.www1.hp.com/products/servers/proliantstorage/rack-options/index.html .			

HP KVM Switch Options	IP Console Switch Box (KVM/IP), 3 x 1 x 16	262586-B21
	IP Console Switch Box (KVM/IP), 1 x 1 x 16	262585-B21
	Server Console Switch (KVM), 0 x 1 x 8 port	336044-B21
	Server Console Switch (KVM), 0 x 2 x 16 port	336045-B21
	PS/2 Interface Adapter, 1 pack	262588-B21
	PS/2 Interface Adapter, 8 pack	262587-B21
	USB Interface Adapter, 1 pack	336047-B21
	Serial Interface adapter - 1 Pack with power supply	373035-B21
	NOTE: Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL: http://www.hp.com/go/kvm .	
	HP 1x 4 USB/PS2 KVM Switch, TT (NA/JPN)	371301-D71
	HP 1x 4 USB/PS2 KVM Switch, TT (AU/NZ)	371301-011
	HP 1x 4 USB/PS2 KVM Switch, TT (UK)	371301-031
	HP 1x 4 USB/PS2 KVM Switch, TT (EU)	371301-A21
	HP 1x 4 USB/PS2 KVM Switch, RM (ALL)	371302-B21
	HP PS2 KVM Cable with audio, 6', 2-pack	371730-B21
HP USB KVM Cable with audio, 6', 2-pack	371729-B21	

Options

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

HP Serial Console Server Options	HP 16 Port Serial Console Server (worldwide)	AF101A
	HP 48 Port Serial Console Server (worldwide)	AF102A
	Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
	Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A

NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: <http://www.hp.com/go/kvm>.

NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <http://www.hp.com/go/kvm>.

Service and Support Offerings (HP Care Pack Services)	Hardware Services 4-Hour On-site Service	
	4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	U4496E
	4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	U4497E
	Hardware Services 6-Hour Call to Repair On-site Service	
	6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	U4498E
	Hardware Services Next Business Day On-Site Service	
	Hardware Installation, Electronic	U4506E
	Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays, Electronic	U4507E
	Support Plus	
	Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic	U4508E
	Support Plus 24	
	Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U4509E
	Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U6310E
Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U8332E	
NOTE: For more information, customer/resellers can contact http://www.hp.com/services/carepack .		

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

HP ProLiant DL360 G4p Standard Models

Standard Memory

1 GB PC2-3200 DDR2 400 Registered SDRAM DIMM installed (2 x 512 MB SDRAM DIMM)

Upgrading Memory and Memory Interleaving

When upgrading memory, DIMMs 1A and 2A must match. DIMMs 3B and 4B, and DIMMs 5C and 6C must match and must be installed as a pair. When DIMMs 1A and 2A are populated the system is automatically configured for 2:1 interleaving. When four or six DIMMs are populated with identical DIMMs the system is automatically configured for bank interleaving.

Standard Memory Plus Optional Memory

Up to 9 GB memory is available with the standard memory of 1 GB and the optional installation of PC2-3200 DDR2 400 Registered SDRAM DIMM memory kits.

Standard Memory Replaced with Optional Memory

Up to 12 GB of memory is available with the removal of the standard 512 MB of memory and the optional installation of PC2-3200 DDR2 400 Registered SDRAM DIMM memory kits.

NOTE: Chart does not represent all possible configurations.

Memory		Slot					
		1	2	3	4	5	6
Standard	1 GB	512 MB	512 MB	Empty	Empty	Empty	Empty
Optional	9 GB	512 MB	512 MB	2 GB	2 GB	2 GB	2 GB
Maximum	12 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB

NOTE: In the online spare configuration, the ROM automatically configures the last populated bank as the spare memory. If only banks A and B are populated, bank B is the spare bank. If banks A, B, and C are populated, bank C is the spare bank, Online spare memory is configured through RBSU.

Following are memory options available from HP:

- 1 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Memory Kit (2 x 512 MB) 343055-B21
- 2 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Memory Kit (2 x 1 GB) 343056-B21
- 4 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Single Rank Memory Kit (2 x 2 GB) 343057-B21
- 4 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Dual Rank Memory Kit (2 x 2 GB) 375004-B21

Memory

HP ProLiant DL360 G4p RPS Models

Standard Memory

2 GB PC3200 DDR 400 Registered SDRAM DIMM installed (2 x 1 GB SDRAM DIMM)

Upgrading Memory and Memory Interleaving

When upgrading memory, DIMMs 1A and 2A must match. DIMMs 3B and 4B, and DIMMs 5C and 6C must match and must be installed as a pair. When DIMMs 1A and 2A are populated the system is automatically configured for 2:1 interleaving. When four or six DIMMs are populated with identical DIMMs the system is automatically configured for bank interleaving.

Standard Memory Plus Optional Memory

Up to 10 GB memory is available with the standard memory of 2 GB and the optional installation of PC2-3200 DDR2 400 Registered SDRAM DIMM memory kits.

Standard Memory Replaced with Optional Memory

Up to 12 GB of memory is available with the removal of the standard 1 GB of memory and the optional installation of PC2-3200 DDR2 400 Registered SDRAM DIMM memory kits.

NOTE: Chart does not represent all possible configurations.

Memory		Slot					
		1	2	3	4	5	6
Standard	2 GB	1 GB	1 GB	Empty	Empty	Empty	Empty
Optional	10 GB	1 GB	1 GB	2 GB	2 GB	2 GB	2 GB
Maximum	12 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB

NOTE: In the online spare configuration, the ROM automatically configures the last populated bank as the spare memory. If only banks A and B are populated, bank B is the spare bank. If banks A, B, and C are populated, bank C is the spare bank, Online spare memory is configured through RBSU.

Following are memory options available from HP:

- 1 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Memory Kit (2 x 512 MB) 343055-B21
- 2 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Memory Kit (2 x 1 GB) 343056-B21
- 4 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Single Rank Memory Kit (2 x 2 GB) 343057-B21
- 4 GB Advanced ECC PC2-3200 DDR2 SDRAM DIMM Dual Rank Memory Kit (2 x 2 GB) 375004-B21


NOTE: Online Spare Memory is not supported when using 2-rank DIMMs. A total of 8 ranks are supported on the HP ProLiant DL360 G4p, A maximum of 4, 2-rank DIMMs can be populated. If you plan to mix DIMM types, 2-rank DIMMs must be installed in the first bank, 1 rank DIMMs can then be installed in subsequent banks.

The following is the memory population rules for the HP ProLiant ProLiant DL360 G4p.


Key: S denotes single rank kit, D denotes Dual rank kit, and X denotes no install.

Bank A	Bank B	Bank C	NOTES:
S	X	X	
S	S	X	
S	S	S	
D	X	X	Online spare not supported
D	S	X	Online spare not supported
D	S	S	Online spare not supported
D	D	X	Online spare not supported

Storage



- 1,0 2 x 1 inch Ultra320 Hot Pluggable Hard Drive Bays; SATA model also available
- A 1.44-MB Diskette Drive (removeable)
- B Low-Profile 24x IDE CD-ROM (ejectable)

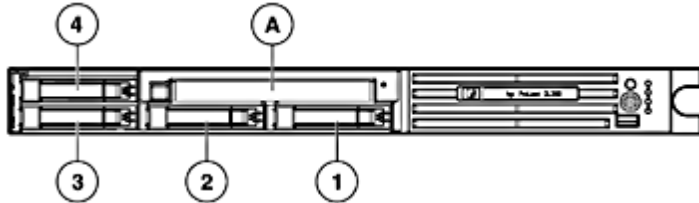

- 1,2,3,4 4 x Small Form Factor Serial Attached SCSI Hot Pluggable Hard Drive Bays
- A Multibay: Slimline 24x CD-ROM (ejectable)

Drive Support - SAS Models

	Quantity Supported	Position Supported	Controller
Removable Media			
Slimline 1.44-MB Diskette Drive	Up to 1	A	Integrated
Slimline 24x IDE CD-ROM Drive	Up to 1	A	Integrated IDE
Slimline DVD-Rom Drive (8x/24x) Option Kit (Servers)	Up to 1	A	Integrated IDE

Drive Support - SCSI Models

	Quantity Supported	Position Supported	Controller
Removable Media			
1.44-MB Diskette Drive	Up to 1	A	Integrated
Slimline 24x IDE CD-ROM Drive	Up to 1	B	Integrated IDE
Slimline DVD-Rom Drive (8x/24x) Option Kit (Servers)	Up to 1	B	Integrated IDE

Storage

Hard Drives

Ultra320 Hot Pluggable Drives

NOTE: The HP ProLiant DL360 G4p only supports U320 Universal drives.

	Quantity Supported	Position Supported	Controller
1-inch	Up to 2	0-1	Smart Array 6i Controller (integrated on system board)
300 GB 10,000 rpm			NOTE: The HP ProLiant DL360 G4p does not offer an external SCSI port.
146.8 GB 10,000 rpm			Smart Array 6402/128 Controller
72.8 GB 10,000 rpm			Smart Array 6404/256 Controller
146.8 GB 15,000 rpm			Smart Array 642 Controller
72.8 GB 15,000 rpm			64-Bit/133-MHz Dual Channel Ultra320 SCSI Adapter
36.4 GB 15,000 rpm			

SAS Hard Drive

	Quantity Supported	Position Supported	Controller
2.5-inch	4	1-4	Smart Array P600 Controller
36 GB 10,000 rpm			
72 GB 10,000 rpm			

Serial-ATA (SATA) Hard Drive

NOTE: The HP embedded 2 Port SATA controller does not support RAID, hot plug drive functionality or drive activity LEDs.

	Quantity Supported	Position Supported	Controller
3.5-inch	Up to 2	0-1	HP embedded 2 Port SATA Controller with RAID 0/1 support
80 GB 7,200 rpm			
160 GB 7,200 rpm			
250 GB 7,200 rpm			
500 GB 7,200 rpm			
2.5-inch	Up to 2	0-1	HP embedded 2 Port SATA Controller with RAID 0/1 support
60 GB 5,400 rpm			

Storage

External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
Modular Smart Array 20 Family	Please see the Modular Smart Array 20 QuickSpecs to determine configuration requirements	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller Smart Array 642 Controller 64-Bit/133-MHz Dual Channel Ultra320 SCSI Adapter 64-Bit/66-MHz Dual Channel Wide Ultra3 SCSI Adapter, Alternate OS
Modular Smart Array 30 Family	Please see the Modular Smart Array 30 QuickSpecs to determine configuration requirements.	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller Smart Array 642 Controller 64-Bit/133-MHz Dual Channel Ultra320 SCSI Adapter 64-Bit/66-MHz Dual Channel Wide Ultra3 SCSI Adapter, Alternate OS
Modular Smart Array 50 Enclosure	2	External	HP Smart Array P600 Controller
Modular Smart Array 500 G2 System	1	External	Smart Array 642 Controller (used as Host Bus Adapter) Please see the Modular Smart Array 500 G2 QuickSpecs for the latest list of supported HBAs: http://www.hp.com/go/msa500
Modular Smart Array 1500 cs	Please see the Modular Smart Array 1500 cs QuickSpecs below to determine configuration requirements	External	Please see the Modular Smart Array 1500 cs QuickSpecs (URL below) for the latest list of supported HBAs
Modular Smart Array 1000	Please see the Modular Smart Array 1000 QuickSpecs below to determine configuration requirements	External	Please see the Modular Smart Array 1000 QuickSpecs (URL below) for the latest list of supported HBAs
Modular Smart Array 1000: http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML (Worldwide) http://h18000.www1.hp.com/products/quickspecs/11033_na/11033_na.HTML (North America)			
Modular Smart Array 1500 cs: http://www.hp.com/go/MSA1500cs			

Tape Drives, Tape Autoloaders, & Tape Libraries

Storage

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:
http://h18000.www1.hp.com/products/quickspecs/North_America/10233.html (North America)
<http://h18000.www1.hp.com/products/quickspecs/Division/10233.html> (Worldwide)

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Autoloaders and Tape Libraries listed below, please see the following:
http://h18000.www1.hp.com/products/quickspecs/North_America/10809.html (North America)
<http://h18000.www1.hp.com/products/quickspecs/Division/10809.html> (Worldwide)

NOTE: For complete listing of tape drive offerings see
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

	Quantity Supported	Position Supported	Controller
HP StorageWorks Tape Drives, External Ultrium 215 Ultrium 232 Ultrium 448 Ultrium 460 DAT 40 DAT 72 DLT VS80 DLT VS160 SDLT 320	Up to 2	External	64-Bit/133MHz Dual Channel Ultra320 SCSI Adapter 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 64-Bit/66-MHz Dual Channel Wide Ultra3 SCSI Adapter, Alternate OS
HP StorageWorks Tape Drives, External DAT 24 USB DAT 40 USB DAT 72 USB	Up to 2	External	USB Port
HP StorageWorks Tape Drives, External Ultrium 960 SDLT 600	1	External	64-Bit/133MHz Dual Channel Ultra320 SCSI Adapter 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 64-Bit/66-MHz Dual Channel Wide Ultra3 SCSI Adapter, Alternate OS
HP StorageWorks Autoloaders, External DAT 72x6 Tape Autoloader 1/8 Tape Autoloader SSL1016 Tape Autoloader	1 autoloader per SCSI channel	External	64-Bit/133MHz Dual Channel Ultra320 SCSI Adapter 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 64-Bit/66-MHz Dual Channel Wide Ultra3 SCSI Adapter, Alternate OS
HP StorageWorks Rack-mount Tape Drive Enclosures 1U Rack-Mount Kit 3U Rack-Mount Kit 5U Rack-Mount Kit	1 per SCSI channel	External	64-Bit/133MHz Dual Channel Ultra320 SCSI Adapter 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 64-Bit/66-MHz Dual Channel Wide Ultra3 SCSI Adapter, Alternate OS

Storage

HP StorageWorks Tape Libraries, External

MSL2024 (Ultrium 960-based)
MSL2024 (Ultrium 448-based)
MSL6000 (Ultrium 960 - based)
MSL6000 (SDLT 600-based)
MSL6000 (Ultrium 460 - based)
MSL5026S2 (SDLT 320-based)
MSL5052S2 (SDLT 320-based)

Please reference the MSL Tape Library QuickSpecs to determine configuration requirements

External

Please consult the EBS connectivity matrix at <http://www.hp.com/go/ebs> for detailed connectivity information.

Power Specifications

To review typical system power ratings use the Active Answers Power Calculator which is available via the online tool located at URL:
<http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls>

To drill down to calculators:

- Click on: "ProLiant Servers"
- Click on the Server of interest. Example: DL360 G4p
- Click on: "Power Calculator" link. (You may need to scroll down to see it)

Technical Specifications

System Unit	Dimensions (H x W x D)	1.70 x 16.78 x 27.75 in (4.32 x 42.62 x 70.49 cm)
	Weight	Maximum (two hard drives installed, two power supply, two processor) 37 lb (16.78 kg) No hard drives installed, one power supply, one processor 27.5 lb (12.47 kg)
	Input Requirements	Rated Input Voltage 100 to 240 VAC Rated Input Current 5.85 Amps (100 V) to 2.85 Amps (200 V) Rated Input Frequency 50 to 60 Hz Rated Input Power 585 W (100VAC) to 565 W (200VAC) NOTE: 585 W of Rated Input Power is for the Maximum Peak Output Power of 535 W.
	BTU Rating	2000 BTU/HR NOTE: The BTU rating listed is for the Rated Input Power of 585 W.
	Power Specifications	To review typical system power ratings use the Power Calculator which is available via the online tool located at URL: http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls To drill down to calculators: - Click on: "ProLiant Servers" - Click on the Server of interest. Example: DL360 G4p - Click on: "Power Calculator" link. (You may need to scroll down to see it)
	Power Supply Output Power (per power supply)	Rated Steady-State Power 535 W
	Temperature Range	Operating 10° to 35°C at sea level with an altitude derating of 1.0°C per every 300m (1000ft) above sea level to a maximum of 3000m (10,000ft), no direct sustained sunlight. Maximum rate of change is 10°C/Hr. Storage -30° to 60°C - Maximum rate of change is 20°C/Hr.
	Relative Humidity (non-condensing)	Operating 10 to 90% relative humidity (Rh), 28°C maximum wet bulb temperature Storage 5 to 95% relative humidity (Rh), 38.7°C maximum wet bulb temperature
	Maximum Wet Bulb Temperature	38.7° C
	SCSI Connectors	No external VHDCI connector
	Acoustic Noise	Idle (Fixed Disk Drives Spinning) L _{WAd} (BELS) 6.6

Technical Specifications

L _{pAm} (dBA)	50
Operating (Random Seeks to Fixed Disks)	
L _{wAd} (BELS)	6.9 BELS
L _{pAm} (dBA)	53 dBA

Smart Array 6i Controller (integrated on system board) (SCSI models)	Data Compatible with all Smart Array Controllers	Yes
	Instant Upgrades to other Smart Array Controllers	Yes
	Consistent Software Manageability Tools	Yes
	PCI-X Bus	64-bit up to 133 (integrated on system board)
	PCI-X Peak Data Transfer Rate	1066 MB/s
	SCSI Protocols Supported	Ultra320, Ultra3, Ultra2
	SCSI Peak Data Transfer Rate	320 MB/s
	Channels	1
	SCSI Ports (external/internal)	0/1
	Drives Supported (maximum)	2 drives
	Cache	64 MB Read Cache
	Battery-Backed Write Cache	Yes, with installation of Battery-Backed Write Cache Enabler, up to 128MB
	RAID Support	0, 1, 1+0, 5
	Logical Drives (maximum)	32 logical drives
	Online Configuration	Yes
	Online Capacity Expansion	Yes
	Logical Drive Capacity Extension	Yes
	Online Stripe Size Migration	Yes
	Online RAID Level Migration	Yes
	Online Spare Support	Yes
Automatic Data Recovery	Yes	
Drive Roaming	Yes	

Technical Specifications

Integrated Serial ATA Controller (SATA models)	Simultaneous drive transfer channels	Support for up to 2 hard drives
	Transfer rate synchronous (maximum theoretical)	150 MB/s per channel; 300MB/s in RAID 0 pair
	Protocol	Serial ATA
	Drive support	HP Universal Serial ATA
	Data transfer modes	ATA data-transfer modes supported SATA 1.0, SATA II PIO modes 0-4 Multiword DMA modes 0-2 Ultra DMA modes 0-6
	Feature	Supports Pre-Failure Warranty of SATA Hard Drives Support for Systems Insight Manager Supports multiple logical volumes Setup through ROM based Array Configuration Utility Installation scripting support
	OS Support	Microsoft Windows 2000 Server Microsoft Windows Server 2003 Novell NetWare Linux (Red Hat, SuSE, UnitedLinux)

NOTE: This controller does not support LED functions. This controller does not support Hot Plug functions.

Smart Array P600 Controller (SAS models only)	Disk Drive and Enclosure Protocol Support	3 Gbps SAS (Serial Attached SCSI) 1.5 Gbps SATA (Serial Advanced Technology Attachment)
	Architecture	1.5 Gb SATA
	SAS Connectors	1 internal SFF8484 & 1 external SFF8470 / internal SFF8484 shared x4 Wide SAS Ports 12 Gbps per x4 Wide SAS Port (4 x 3 Gbps)
	Data Transfer Method	64-bit wide, PCIX 133 MHz (1 GB/s maximum bandwidth)
	PCI Bus Speed	PCIX-133 and 3.3 volt PCI compatibility only
	Memory Bus Speed	DDR-266 and 72 bit wide bus
	PCI	64-bit, 133-MHz PCI-X (1 GB/s maximum bandwidth)
	Simultaneous Drive Transfer Ports	PCI-X and 3.3 volt PCI compatibility only
	Port Transfer Rate	2 x4 Wide SAS Ports
	Software upgradeable Firmware	12 Gb/s per x4 Wide SAS Port (4 x 3 Gb/s)
	Cache Memory	Yes
	Logical Drives Supported	256 MB Read/Write (512-MB module upgrade available); ECC protection, battery-backed, and removable
	Maximum Capacity	Up to 32 logical drives Up to 2.2 TB per logical drive
	Memory Addressing	2.7 TB (38 x 72 GB) 64-bit, supporting servers memory greater than 4 GB

Technical Specifications

RAID Support	RAID 6 (Advanced Data Guarding) RAID 5 (Distributed Data Guarding) RAID 1+0 (Striping & Mirroring) RAID 0 (Striping)
Upgradeable Firmware Disk Drive and Enclosure Protocol Support	4-MB flashable ROM 3 Gb SAS and 1.5 Gb SATA

Embedded NC7782 Dual Port PCI-X 10/100/1000T Gigabit network adapter	Network Interface	10/100/1000-T	
	Compatibility	EEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX	
	Data Transfer Method	64-bit/66MHz PCI-X	
	Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s
		10Base-T (Full-Duplex)	20 Mb/s
		100Base-TX (Half-Duplex)	100 Mb/s
		100Base-TX (Full-Duplex)	200 Mb/s
	1000Base-TX (Half and Full-Duplex)	2000 Mb/s	
Connector	RJ-45		
Cable Support	10Base-T	Categories 3, 4 or 5 UTP up to 328 ft (100 m)	
	10/100/1000 Base-TX	Category 5 UTP up to 328 ft (100 m)	

© Copyright 2005 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.